

# KENCOVE

## FARM FENCE SUPPLIES

2010

Edition 1

High-Tensile, Woven Wire, Posts, Gates, Electric, Portable Supplies, Horse Fence



## New Products

Coated Wire  
Tensioner



Page 34

Portable  
Electric Netting



Page 20

Safety-Loop  
Connector



Page 34

Stafix 6-joule  
Unigizer™



Page 20

Deer Fence  
20/96/6



Page 4

**FREE SHIPPING**

On Qualified Orders Details on Page 38

**800-536-2683**

[www.kencove.com](http://www.kencove.com)



## MAX-TEN 200<sup>®</sup> High-Tensile Fence Wire



### 200 KSI 12½ Gauge, MAX-TEN 200

Nearly twice the breaking strength of standard two-strand barbed wire.

- Electro-galvanized
- Polished
- Class 3 Galvanized

*Min. break strength = 1540 lbs*

4000' coil, FOB	.....	WK2	.....	<b>91.75</b>
2000' coil, FOB	.....	WK2D	.....	<b>48.75</b>
Shorts, per ft, FOB	.....	WK2FT	.....	<b>0.02</b>

## MAX-TEN 200+<sup>®</sup>

**210 KSI 12½ Gauge** wire is the highest quality. It can be wrapped tightly around its own diameter without breaking.

- Electro-galvanized
- High strength & resiliency



*Min. break strength = 1617 lbs*

4000' coil, 105 lb, FOB	.....	WM2	.....	<b>99.75</b>
2000' coil, 52 lb, FOB	.....	WM2D	.....	<b>53.75</b>

### Quantity Discounts - 4000' Coils

5 Rolls	.....	Save \$1 per roll
10 Rolls	.....	Save \$2 per roll
20 Rolls	.....	Save \$3 per roll
50 Rolls	.....	Save \$4 per roll

Class 3 galvanized wire resists rust up to three times longer than traditional farm store wire.

## 180 KSI 12½ Gauge GALFAN

Class 3 zinc alloy coating offers advantages beyond conventional galvanizing. Galfan is manufactured with a hot-dip galvanizing process using Zinc, Aluminum and a trace of mischmetal for extended corrosion resistance. This coating provides up to four times the corrosion protection as class 3 galvanized coatings. Galfan wire will turn a bit darker gray than our other wires.

*Min. break strength = 1385 lbs*

4000' coil, 105 lb, FOB	.....	WG18	.....	<b>99.75</b>
2160' coil, 56 lb, FOB	.....	WG18U	.....	<b>57.50</b>
Shorts, per ft, FOB	.....	WG18FT	.....	<b>0.03</b>



## 180 KSI 12½ Gauge

In New Zealand, 180,000 PSI wire is the standard for both electric and non-electric fences. *Min. break strength = 1385 lbs*

- Class 3 galvanized
- Excellent wire payout
- Perfect for hand-knotting

4000' coil, 100 lb, FOB	.....	WSA2	.....	<b>85.75</b>
2000' coil, 52 lb, FOB	.....	WSA2D	.....	<b>45.75</b>
Shorts, per ft, FOB	.....	WSAFT	.....	<b>0.02</b>

## MAX-TEN 170

### 170 KSI 12½ Gauge



- Class 3 galvanized
- Easy to bend
- Recommended for electric fences
- 140,000 - 170,000 PSI

*Min. break strength = 1078 lbs*

4000' coil, FOB	.....	WB17	.....	<b>85.75</b>
2000' coil, FOB	.....	WB17D	.....	<b>45.75</b>

Wire products do not qualify for free shipping



High-Tensile Fence Installation DVD	.....	AHTD	.....	<b>10.00</b>
Woven Wire Fence Installation DVD	.....	ATD	.....	<b>10.00</b>
Max-Ten How to Build Trellises Book	.....	ABT	.....	<b>4.00</b>
Max-Ten How to Build H-T Fence Book	.....	ABF	.....	<b>10.00</b>

## 14 Gauge High-Tensile, 200 KSI

- Can be stretched to high tension
  - Retracts to original length
- Min. break strength = 1004 lbs*
- 5000' coil, 86 lb, FOB . . . . WM45 . . . . **91.75**  
 3800' coil, 65 lb, FOB . . . . WM4 . . . . **69.75**  
 Shorts, per ft, FOB. . . . . WM4FT . . . . **0.02**

## 16 Gauge High-Tensile

- Ideal for subdivision and Spider systems
  - Requires minimal maintenance
  - Less tension required
- 6000' coil, FOB. . . . . WM6 . . . . . **75.75**  
 3000' coil, FOB. . . . . WM6D. . . . . **39.75**  
 Shorts, per ft, FOB. . . . . WM6FT . . . . **0.01**

**Lasts up to three times longer  
than traditional farm store wire!**

## Easy Pay-out Reels

- Convenient dispenser
  - Soft wire
  - Fast & easy to use
  - Class 3 galvanized
- 12.5 gauge, 1000', FOB. . . . . WL2 . . . . . **25.75**  
 14 gauge, 1320', FOB . . . . . WL4 . . . . . **28.95**  
 16 gauge, 2640', FOB . . . . . WL6 . . . . . **30.75**



## Barbed Wire

- 15.5 Gauge
  - Class 3 Galvanized
  - 4 points every 5 inches
- Ideal for predator control and exclusion fences.  
*Min. break strength = 950 lbs*
- 1320', FOB. . . . . WBW . . . . . **46.95**



## Aluminum Wire

- Lasts up to 50 years
  - Easy to repair & re-tighten
  - .08" diameter
- 5280' coil, FOB. . . . . WTT12SF . . **127.50**  
 1320' coil, FOB. . . . . WTT12 . . . . **29.75**

- Aluminum Clad Wire** can last up to five times longer in corrosive environments than galvanized wire.  
*Min. break strength = 1500 lbs*
- 3000' coil, FOB. . . . . WAC11 . . . . . **85.50**



## Fixed Knot - Solidlock Fence

- Class 3 galvanized high-tensile
- Graduated spacing
- 12.5 gauge wire

## 3" Stay Spacing, 200' Roll, FOB

- 48" height, 13 lines. . . . . WDN13-3. . . **281.30**  
 61" height, 15 lines. . . . . WDN15-3. . . **361.05**

## 6" Stay Spacing, 330' Roll, FOB

- 120" height, 23 lines. . . . . WDN23-6. . . **623.50**  
 96" height, 20 lines. . . . . WDN20-6. . . **435.00**  
 96" height, 20 lines, Black . . WDN20-6BL **461.10**  
 75" height, 17 lines. . . . . WDN17-6. . . **384.25**  
 61" height, 15 lines. . . . . WDN15-6. . . **330.60**  
 60" height, 10 lines. . . . . WDN10-6. . . **253.75**  
 48" height, 13 lines. . . . . WDN13-6. . . **269.70**  
 49" height, 9 lines. . . . . WDN9-6. . . **204.45**  
 42" height, 8 lines. . . . . WDN8-6. . . **194.30**

## 12" Stay Spacing, 330' Roll, FOB

- 96" height, 20 lines. . . . . WDN20-12. . **343.65**  
 49" height, 9 lines. . . . . WDN9-12. . **159.50**


## 12" Stay Spacing, 660' Roll, FOB

- 49" height, 9 lines. . . WDN9-12-660. . . **275.50**

## 24" Stay Spacing, 330' Roll, FOB

- 36" height, 7 lines. . . . . WDN7-24. . . **107.30**

**Save 5% on 6 or more rolls**

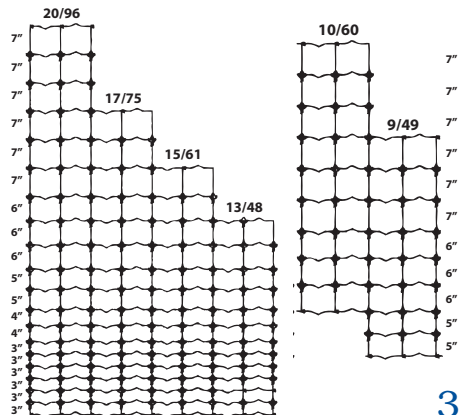

Wire products do not qualify for free shipping



Front



Back

## 2" x 4" Safety Mesh Fence

With class 3 high-tensile wire, this fence is the safest and strongest fence wire. Vertical wire is uncut from top to bottom and all junctions are held together with a special "S" shaped knot. Perfect for all high value livestock and ideal for predator control. Bekaert Horseman 2" x 4" available in black, medium tensile wire.

48", 100', FOB	WH4	140.65
48", 200', FOB	WH4-200	281.30
48", 200', Horseman, FOB	WH4-200B	226.20
48", 200, black, FOB	WH4BL-200	281.30
60", 100', FOB	WH5	168.20
60", 200', FOB	WH5-200	336.40
60", 100', black, FOB	WH5BL	168.20
72", 100', FOB	WH6	217.50



- Designed for deer confinement or exclusion
- 12.5 gauge, class 3 galvanized wire
- 96" height; 6' spacing

Safety Mesh - Deer, FOB . . . WH20-6 . . . **369.75**  
 Save on 6 rolls or more . . . . . **351.26**

### 10/47 Hinge Joint Fence

Designed to secure and protect small animals from predators and escape. Also ideal as a wildlife deterrent in gardens and around newly planted trees and shrubs. Class 3 galvanized coating provides 20 to 40 year life.

- Graduated spacing
- 14 gauge wire
- 6" wire spacing

## Hinge Joint Woven Wire Fence

12½ gauge medium-tensile wire, 330'  
 47" height, 10 lines. . . . WH10-6-14.5. . . **137.75**  
 32" height, 8 lines. . . . WH8-6. . . . . **117.45**  
 26" height, 7 lines. . . . WH7-6. . . . . **101.50**

## Hinge Joint Woven Wire Fence

12½ gauge high-tensile wire, 330'  
 47" height, 10 lines. . . . WH10-6-12.5. . . **203.00**  
 78" height, 14 lines. . . . WH14-6. . . . . **308.85**

## 4" x 4" Sheep & Goat Fence

- Strong confinement
  - Strong "S" knot prevents injury
  - 12.5 gauge, class 3 galvanized wire
  - Easy to install on flat or hilly terrain
- 48" x 100', FOB . . . . . WH4X4-100. . . . . **90.84**  
 Save on 6 rolls or more . . . . . **86.30**  
 48" x 330', FOB . . . . . WH4X4 . . . . . **299.79**  
 Save on 6 rolls or more . . . . . **284.80**

**Woven Wire does not qualify for free shipping**



## Keepsafe™ V-Mesh Horse Fence

- Diamond weave pattern
- Strong, flexible mesh
- 12.5 gauge, double-twisted horizontal wires
- 14 gauge vertical wires
- Class 3 galvanized wire

The 2" x 4" diamond-mesh construction gives this fence strength and flexibility to protect from injury and prevent predators from entering.

50" x 165', FOB . . . . . WV50 . . . . . **452.40**  
 58" x 165', FOB . . . . . WV58 . . . . . **533.60**



## The Wire Twister

Attach to electric drill to safely and neatly wrap wire ends. This tool gives professional-looking results. 3/8" drill required. Use with 3" minimum woven wire spacing.

Wire Twister, FOB . . . . . TWTG . . . . . **345.00**



## Kencove Stretcher Bars

Wedges are placed vertically and staggered on the stretcher bar, making it easy to place the wire in the center of the bar. This system is especially useful when working with 2" x 4" woven wire or with 3" verticals.

4 ft, 5 wedges, FOB . . . . . TSC4 . . . . . **99.75**  
 5 ft, 6 wedges, FOB . . . . . TSC5 . . . . . **129.95**  
 6 ft, 7 wedges, FOB . . . . . TSC6 . . . . . **144.50**  
 8 ft, 9 wedges, FOB . . . . . TSC8 . . . . . **169.75**  
 10 ft, 11 wedges, FOB . . . . . TSC10 . . . . . **195.50**  
 Additional wedges, FOB . . . . . TSCW . . . . . **8.50**  
 62" Woven Wire Clamp, FOB . . . . . TSCW5 . . . . . **139.75**



## Kencove Chain Grab

• Extra long chain  
 • Electroplated for rust protection  
 • Use with smooth or coated wire  
 • Includes convenient anchor hook

Kencove Chain Grab . . . . . TCHK . . . . . **55.50**



Hayes Clamp Strainer . . . . . TCS . . . . . **115.00**

Kencove Stretcher Bar Puller . . . . . TCSK . . . . . **75.50**

Clamp Strainer . . . . . TCSR . . . . . **95.75**

Hand Wrap Tool . . . . . TWTL . . . . . **1.25**

Tightlock Installation DVD . . . . . ATD . . . . . **10.00**

## Wire Bending Tool

Adds a tension curve in wire to eliminate sag. This tool is a must-have for woven wire fence built on undulating ground. Made in China of cast aluminum.

Wire Bending Tool . . . . . TBT . . . . . **12.95**



## Hayes Chain Grab

• Cast claws lock onto the chain  
 • Use with smooth or coated wire  
 • Simply squeeze the grips to release wire!

Hayes Chain Grab . . . . . TCH . . . . . **79.50**





**See Video Online**

## Kencove Tension Springs

- Acts as a shock absorber
- Indicates amount of wire tension
- Maintains tension on fence line
- Galvan coating and strong drawbars

**Highest strength and longest lasting spring on the market!**

HD Tension Spring, FOB . . . . . HTSHD . . . . .	<b>4.75</b>
Long Tug Spring, FOB . . . . . HTSL . . . . .	<b>4.75</b>
Insulator for HTSL . . . . . ICP1 . . . . .	<b>0.45</b>



## Quik Brace

- Fast & easy to install
- Safe for horses
- Use on H-Posts or box strainers

Includes length of high-tensile galvanized steel cable with loop at one end and Gripple cable grip. Note: For maximum strength and safety, install Gripple 18-24" away from line post.

Single brace, 12 ft (16.5 ft cable) . . . HQBS12 . . .	<b>8.95</b>
Tensioning tool . . . . . TGTP . . . . .	<b>39.75</b>



**easy to install**

## Earth Anchors

- Fast, easy installation
- Superior holding strength


DB-40, 250 lb hold. . . . . DB4 . . . . .	<b>1.95</b>
DB-68, 1100 lb hold . . . . . DB6 . . . . .	<b>2.95</b>
DB-88, 2500 lb hold . . . . . DB8 . . . . .	<b>4.95</b>

## Guy Wire

Stainless, 11.3 ga., 10 ft . . . . DSC10 . . . .	<b>2.40</b>
Stainless, 11.3 ga., per ft . . . DSCFT . . . .	<b>0.24</b>
Nylon, 8 ga., per ft . . . . . DW152 . . . . .	<b>0.16</b>

## Drive Rods

For DB4, 1/4" x 2 ft . . . . . DB4DR . . . . .	<b>3.75</b>
For DB6, 1/2" x 32 1/2" . . . . . DB6DR . . . . .	<b>7.95</b>
For DB8, 3/4" x 4 ft, FOB . . . . DB8DR . . . .	<b>9.95</b>

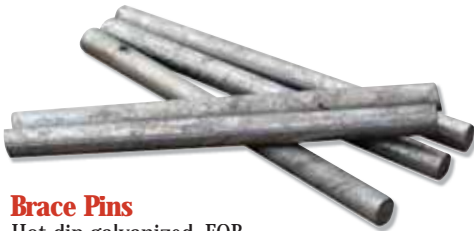

## Brace Pins

Hot-dip galvanized, FOB

4" x .35, Each. . . . . H4PE . . . . .	<b>0.23</b>
Save on 100/box . . . . . H4PK . . . . .	<b>19.55</b>
5" x .35, Each. . . . . H5PE . . . . .	<b>0.28</b>
Save on 100/box . . . . . H5PK . . . . .	<b>24.25</b>
9" x .35, Each. . . . . H9PE . . . . .	<b>0.45</b>
Save on 100/box . . . . . H9PK . . . . .	<b>38.25</b>
10" x .35, Each. . . . . H1PE . . . . .	<b>0.50</b>
Save on 100/box . . . . . H1PK . . . . .	<b>41.65</b>
12" x .35, Each. . . . . H12PE . . . . .	<b>0.60</b>
Save on 100/box . . . . . H12PK . . . . .	<b>51.85</b>



## Ship Auger Drill Bits

- Designed to clear shavings quickly
- Full length heat treatment
- Self-feeding

Use the 3/8" diameter for brace pins. Use the 3/4" diameter for mounting gate hinge bolts. Save time, effort and money by getting one of each diameter.

3/8" x 7 7/8" . . . . . TDB388 . . . . .	<b>8.95</b>
3/8" x 17" . . . . . TDB3 . . . . .	<b>19.95</b>
3/4" x 13" . . . . . TDB3413 . . . . .	<b>18.95</b>



### Non-Wheel Spinning Jenny

- Pivots on ground pin
- 4 adjustable arms
- Accommodates all coil sizes, including coated wire
- Ships unassembled

Non-Wheel Spinning Jenny

TSJA ..... **49.95**



### Spinning Jenny with Brake

The spring-braked jenny features an adjustable brake to control over-spin when you stop pulling wire. This jenny may be placed flat on the ground or bolted to a cart or truck bed. Three legs in the base give good stability. The four arms adjust to fit many diameter coils, including coated wire products (not for use with woven wire or Horserail) Optional hoop (TSJRH) allows for easy rewinding. Free shipping.

Spinning Jenny with brake. . . TSJHH . . . **69.75**

Rewind hoop . . . . . TSJRH . . . **35.50**



### Meterman Measuring Wheel

- 19" diameter wheel
- Accurate measurements in any terrain
- Reading up to 10,000 ft
- Adjustable twist and lock handle

Measuring Wheel

TMW ..... **69.00**

### Visit us online

More products and installation tips on the web at [www.kencove.com](http://www.kencove.com)



### Class 3 Galvanized Staples

1¼", 88 staples/lb, single barbed, FOB . . . . . HB1 . . . **1.65/lb**

1½", 62 staples/lb, single barbed, FOB . . . . . HBM . . . **1.65/lb**

1¾", 53 staples/lb, double barbed, FOB . . . . . HBS . . . **1.65/lb**

2", 48 staples/lb, double barbed, FOB . . . . . HB2 . . . **1.65/lb**

2" wide, 46 staples/lb, single barbed, FOB . . . . HB2W . . **1.65/lb**

*(Use 2" wide staples for coated wire products)*

Save on 10 lb buckets, FOB . . . . . HB\*10 . . . **15.50**

Save on 40 lb buckets, FOB . . . . . HB\*40 . . . **54.00**

\*Indicate staple size. *Staples do not qualify for free shipping*

### Staple Drivers

Simple to use and no moving parts to damage. Just insert the staple into the slot and hammer on the pin.

Staple driver, standard . . . . . TDSD . . . . . **11.95**

Staple driver for 2" wide staples . . . . . TDSDW . . . . . **11.95**



## Gripple

- Use to join or tension
- No tying knots or twisting wire
- Serrated rollers grip the wire to hold securely



Small, 17-14 gauge .....	CGS .....	<b>1.16</b>
Medium, 14-12 gauge or 15½ gauge barb .....	CGM .....	<b>1.25</b>
Large, 12-8 gauge or 12½ gauge barb .....	CGL .....	<b>1.59</b>
Gripple 1, 15 - 11 gauge, for metal end posts .....	CG1 .....	<b>1.25</b>
Gripple #4 with locking screw, use with 3/16" cable .....	CG4 .....	<b>4.95</b>



**TGTP**

## Gripple Tools

Tensioning Tool, plastic .....	TGTP .....	<b>39.75</b>
Tensioning Tool, original-style, .....	TGT .....	<b>69.95</b>
Cable Cutter, spring-loaded handle .....	TCTG .....	<b>29.95</b>

## Fastlok

Fast and easy in-line splices! The Fastlok holds stronger than similar 12½ gauge splicers. Kencove's pull testing results in more than 1580 lbs breaking strength. For additional tension, use the Tensioning Tool (TGTP).



- Reusable
  - Perfect for ends & brace wires
  - Use with 12½ gauge wire
- Fastlok, each .....
- |                          |             |
|--------------------------|-------------|
| CLO .....                | <b>0.99</b> |
| Save on 60 or more ..... | <b>0.95</b> |

## The Wrap Connector

- Use with 12½ gauge wire
  - No tools required
- Requires two connectors per splice
- Wrap Connector, each .....
- |           |             |
|-----------|-------------|
| CWC ..... | <b>0.50</b> |
|-----------|-------------|



**CWV1213**

## Quik-End

- Quickly terminate wire at end posts
  - Use one for each wire on your fence
  - For faster, easier tensioning, use the Tensioning Tool
- |                       |               |              |
|-----------------------|---------------|--------------|
| 12½ gauge .....       | CWV1213 ..... | <b>1.75</b>  |
| 14-16 gauge .....     | CWV1416 ..... | <b>1.75</b>  |
| 10-11 gauge .....     | CWV1011 ..... | <b>1.75</b>  |
| 8-9 gauge .....       | CWV89 .....   | <b>1.75</b>  |
| Tensioning Tool ..... | TGTP .....    | <b>39.75</b> |

## Gripple T-Clip

- Use with 14-10 gauge wire
- Internal spring mechanism
- Recommended for woven wire fence
- Secures wire at end of fence line



T-Clip, each .....	CGT .....	<b>1.37</b>
--------------------	-----------	-------------



**CWL1213**

## Quik-Splice

- Splice wires without a tool!  
Internal spring-loaded clamps
- |                   |               |             |
|-------------------|---------------|-------------|
| 12½ gauge .....   | CWL1213 ..... | <b>1.95</b> |
| 14-16 gauge ..... | CWL1416 ..... | <b>1.95</b> |
| 10-11 gauge ..... | CWL1011 ..... | <b>1.95</b> |
| 8-9 gauge .....   | CWL89 .....   | <b>1.95</b> |



**NEW**

**CWTW**

**The Safety-Loop** is the fastest, easiest way to terminate coated wire. Stripping coated wire is greatly reduced. Simply feed the wire through the Safety-Loop, wrap around post and insert into the spring-loaded end.

Safety-Loop, white .....	CWTW .....	<b>1.99</b>
Safety-Loop, brown .....	CWTBR .....	<b>1.99</b>
Safety-Loop, black .....	CWTBL .....	<b>1.99</b>

- Twist Sticks** are an economical way to tighten diagonal brace wires.  
ACQ-Treated Hardwood  
24", FOB. . . . PTA . . . . **0.95**







## Hayes-style Strainers

- Permanently hinged, flipper catch
- Spring clip
- Safe and easy to use

Stainless strap/zinc cog . . . . .SASS. . . . . **2.95**

Save on 50 . . . . . **2.84/each**

Galvanized strap/alum. cog . . . . .SASAL. . . . . **1.95**

Save on 50 . . . . . **1.85/each**

## Kiwi Strainer with Quik-End

- Eliminates need for crimp sleeves
- Use with 12.5 gauge wire
- Reduces stripping of coated wire

Simply insert wire into Quik-End and tighten!



**NEW**

Kiwi Strainer with Quik-End . . . SASQ . . . **3.95**

**The Mini-tite** hot-dip galvanized strainer is designed for lower tension fences using 14 to 16 gauge wire.

Mini-tite strainer. . . . . SD1G. . . . . **1.09**



**TFU**

## Strainer Handles

Use with all Hayes Style strainers. (SASAL, SAS, SASS, SATS and SAT)

Hayes Handle . . . . .TFH. . . . . **5.25**

Required for SRC, SDS, SDZ strainers.

Universal handle. . . . .TFU. . . . . **8.75**



**TFH**



**See Video Online**

**The KIWI Wire Strainer** is the American-made original; often imitated but never duplicated. With a galvanized strap and spring clip and zinc cog, this is a durable, and long-tested strainer.

Kiwi strainer . . . . . SAS. . . . . **2.95**

Save on 50 . . . . . **2.84/each**

## KIWI Strainer without Clip

- Hinged flipper-type catch
- No spring clip
- Fence wire can be loosened if necessary



Hot-dip galvanized/zinc . . . . . SAT . . . . . **2.85**

Stainless steel strap/zinc cog. . . . . SATS . . . . . **2.85**

Save on 50 . . . . . **2.75/each**

## Donalds Style Strainers

- Tension with crescent or box wrench
- Spring steel latch

Wider cog holds more wire and can be used with 1" Ponyrail.



Galvanized strap/cog . . . . . SDZ . . . . . **2.65**

Stainless strap/alum. cog. . . . . SDS . . . . . **2.15**

Save on 50 . . . . . **2.05/each**

## Original Hayes Strainer

- Catch wire flattened on both ends
- Washer to prevent fallout
- Galvanized strap/Aluminum cog

Original Hayes Strainer . . . SHY . . . . . **1.65**

End insulator. . . . . SHYL. . . . . **1.00**

**CLOSEOUT**

**SHY**

**SHYL**



## EZ-Daisy Inline Tightener

Installed inline without cutting wires during installation. Tighten with a 1/2 inch drive ratchet or EZ-Daisy handle.

EZ-Daisy Tightener . . . . . SSDN . . . . . **1.95**

Save on 50 or more . . . . . **1.85**

EZ-Daisy Handle . . . . . TFD. . . . . **9.95**

**KIWI Inline Tightener** is made with a solid zinc cog and class 3 galvanized clip. Our strongest non-splicing wire strainer. *Low-tension tighteners, see page 33.*

KIWI Inline Tightener . . . . . SSDK . . . . . **1.95**

Save on 50 or more . . . . . **1.85**



**SSDN**

**SSDK**



## EzePull 4-in-1

**FREE SHIPPING**

Crimps all 12½ gauge sleeves. Made in New Zealand. Hardened stainless steel jaws and compact handles make this fencing tool strong and easy to use.

- Wire cutter
- Cable stripper
- Crimper
- Staple puller

EzePull 4-in-1 . . . . . TEP . . . . . **149.75**



**Blue handled 4-Slot Tool** is Kencove's top line of imported tools. Each is carefully inspected and guaranteed for five years of proper use. Ideal for use with all sizes of Kencove crimp sleeves.

Blue Handled 4-slot Tool . . . TKC . . . . . **55.00**



**TCTXA**



## 8" Knipex Center Cutter

- Cuts with minimal effort
- Longest lasting cutter for hard wire
- Made in Germany

Knipex 7101 . . . . . TCTX . . . **59.50**

Knipex 7131, recessed blade . . . TCTXC . . . **65.95**

Knipex with spring handle . . . TCTXS . . . **65.95**


Knipex with angled head . . . . TCTXA . . . **77.50**

## Kencove Fencing Pliers

- Staple puller
- Hammer head
- Wire cutter for soft wire



10" Fencing Pliers . . . . . TFP . . . . . **9.00**

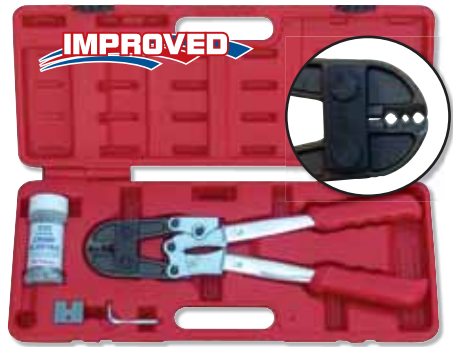

**The Kencove Multi-Function Tool** is lighter to carry than the 4-slot tools. It combines a wire cutter, crimper, gripper/cable stripper and staple puller into one easy-to-use tool. Crimps 12½ gauge sleeves, including: C2SS, C23, C2L, C2LAL. Includes gauge, allen wrench, plastic carry case and FREE bottle of C23 sleeves! Re-designed with longer handle for better leverage. **Free shipping.**

Kencove Multi-Use Tool . . . . . TEC . . . . . **88.50**



**The EzeCrimp** has two size slots to crimp the C23, C45B, CT4, C34 and C45AL sleeves. It can also strip and cut wire.

EzeCrimp . . . . . TMP . . . . . **149.75**

## High-Tensile Wire Cutter

- Ideal for 12½ gauge high-tensile wire
- Made in China

High-Tensile Wire Cutters, 9" . . . . TCT9 . . . **6.00**



## Nine-Inch Cutter

- Greater leverage
- Strong jaw
- Fits in your pocket

9" Wire Cutter . . . . . TCTHD . . . **15.00**



## 8" Side Cutter

- Notched plier jaws
- Extremely rugged
- Ideal for wrapping or hand-knotting wire

8" Side Cutter . . . . . TCTM . . . **59.50**





## Gritted Crimp Sleeves

The C34 gritted crimp sleeve can be used for 10½ gauge smooth wire or 14 gauge high-tensile barbed wire.

10½ ga. smooth, 50/pk . . . . . C34 . . . . . **12.25**

The C45 sleeve works well with 8 gauge smooth and 12½ gauge barbed wire.

8-12½ ga. barbed, 50/pk. . . . . C45 . . . . . **14.75**

Aluminum, 8-10 ga., 50/pk. . . . . C45AL . . . . . **17.00**

12½ ga. barbed wire, 50/pk . . . . . C45B . . . . . **17.00**

The C12 gritted sleeve is designed to work with 14 or 16 gauge wire sizes. These sleeves are small and easy to work with.

14-16 Gauge, 100/pk. . . . . C12 . . . . . **8.50**

## Open Tap Crimp Sleeves

- For permanent electrical connections
- Use on 12½ or 14 gauge wire
- Open side allows for installation onto existing H-T fence

*A crimping tool should be used to compress sleeve. Do not use for connections requiring strength.*

Open taps, 25/pk. . . . . CT4PC25 . . . . . **4.50**

Open taps, 100/pk. . . . . CT4 . . . . . **15.50**



## Zinc Split Bolt Line Taps

- Ensures electrically tight connections
- Can hold several wires
- Simplifies troubleshooting

Zinc Split Bolt Line Tap, each. . . . . CBT . . . . . **0.65**



When wire is spliced in line, three 12½ gauge gritted sleeves are used to maintain the full strength of the wire. At end posts and inline tightener brackets, use two sleeves. C2SS is great for electrical connections with 12½ gauge wire.

## 12½ Gauge Gritted Crimp Sleeves

100/pk . . . . . C23 . . . . . **12.50**

250/pk . . . . . C23-250 . . . . . **31.25**

Short spec, 100/pk . . . . . C2SS . . . . . **4.75**



The C2L gritted crimp sleeve is 70% longer than the C23 and requires at least two side by side crimps to get full strength. It can be used in place of the C23 in many applications.

The C2L works well on Solidlock and other woven wire since these fences are tightened to lower tensions. Use of C2L sleeves in these applications save money since you need one per line splice versus two of the C23 size.

12½ gauge, long, 100/pk . . . . . C2L . . . . . **18.50**

12½ gauge, long, 250/pk . . . . . C2L-250 . . . . . **46.25**

12½ gauge, Aluminum., 100/pk C2LAL . . . . . **18.75**

## Stainless Steel Split Bolt Line Tap

Standard size holds up to five 12.5 gauge wires; large holds up to seven wires or a Safe-Fence Buckle.



SS split bolt, standard, each. . . . . CBTSS . . . . . **0.99**

SS split bolt, large, each . . . . . CBTSSSE . . . . . **1.65**

# Posts

**Postdriver.com** post drivers, made by Shaver Manufacturing, are fast and powerful. With only six moving parts, they are built for durability and easy maintenance. All models take just a few minutes to mount or detach. Shaver manufacturing developed the first powered post driver over 50 years ago. This is why they are a trusted, reliable source for quality machines.



## Features:

- Hydraulic base plate
- Drive up to 10' posts
- Versatile mounting options
- Safety arm for holding post

## Postdriver.com Post Drivers with safety arm, FOB



Post Driver PD8 .....	PDSHD8 .....	<b>1595.00</b>
Post Driver PD8, hydraulic .....	PDSHD8H .....	<b>2495.00</b>
Post Driver PD10 .....	PDSHD10 .....	<b>2880.00</b>
Post Driver PD10, hydraulic .....	PDSHD10H .....	<b>3990.00</b>
Post Driver PD12, hydraulic .....	PDSHD12 .....	<b>4589.50</b>

*Prices do not include mounting bracket.  
Post drivers do not qualify for free shipping.*

## 3-Point Mounting Bracket with manual stabilizer package

For PD8/PD8H, FOB .....	PDS8MB .....	<b>342.00</b>
For PD10/PD10H/PD12, FOB .....	PDS1MB .....	<b>417.60</b>

## Self Contained Mounting Package with stabilizer package

For PD8/PD8H, FOB .....	PDS8SCMP .....	<b>3532.00</b>
For PD10/PD10H/PD12, FOB .....	PDS1SCMP .....	<b>3684.00</b>

## Skid Steer Mounting Bracket

Plastic, for PD8/PD8H, FOB .....	PDS8SMBP .....	<b>1432.00</b>
Plastic, for PD10/PD10H/PD12, FOB .....	PDS1SMBP .....	<b>1584.00</b>
Steel, for PD8/PD8H, FOB .....	PDS8SMBS .....	<b>700.00</b>
Steel, for PD10/PD10H/PD12, FOB .....	PDS1SMBS .....	<b>852.00</b>

**Other parts/accessories available, please call for pricing.**



## Safety Arm Attachment

can be purchased separately for older post driver models. (Standard on newer models)  
PDS9SA, FOB .....140.00

	PD8/PD8H	PD10/PD10H	PD12
Impact	30,000 lbs.	71,500 lbs.	100,000 lbs.
Effective Weight of Hammer	360 lbs.	725 lbs.	1100 lbs.
Operating Height	53" - 126"	53" - 128"	53" - 128'
Max Post Width	7-1/8"	8-3/4"	10-7/8"
Max Post Length	10'	10'	10'
Tilt	15° /15°	15°	20°/25°
Hydraulic Requirements	3-4 GPM 1500 PSI	12 GPM 1500 PSI	15 GPM 2000 PSI
Mounting Options	Front, Rear or Skid Loader	Front, Rear or Skid Loader	Rear or Skid Loader

### KIWI Post Drivers

Developed for high volume users, these units drive all types of wood or steel posts in nearly any soil condition. The KIWI Post Driver is a proven, reliable machine, working in the field for more than 20 years.

- Commercial grade
- 120,000 lb impact on 10" beam
- Versatile mounting options (Truck, Skid Steer, Tractor)
- Optional down pressure auger

*Call for options and pricing*

### Kiwi Fence School

For anyone who wants to learn how to install agricultural fencing or improve skills. Taught by well-known and experienced professionals in the industry, the school offers the latest installation techniques and building options. It is two days of hands-on and classroom training. Call for details.



Free admission to fence school with purchase of KIWI Post Driver!

**Kencove's Tamper** makes a difficult job a little easier. Designed with a 65" galvanized pipe handle and a concave cast iron ramming head. The Tamper weighs 8.5lbs and is ideal for compacting stone and soil around posts.

Tamper, FOB. . . . . TAMP. . . . **19.95**



### KIWI Poly Droppers™

- Superior insulation
- UV-resistant polyethylene
- Notched every inch

4 ft, black, FOB . . . . . PKD . . . . **2.95**

Save on bundle of 50 . . . . . **135.00**

4 ft, white, FOB . . . . . PKDW. . . . **3.55**

Save on bundle of 50 . . . . . **170.00**

Poly-Dropper Clips, 100/pk. . . . FCPK. . . . **6.50**



### Replacement Driver Springs with ends

HD-8/HPD-16, FOB . . . . . PD8S . . . . **27.50**

HD-10/HPD-20, FOB . . . . . PD10S . . . . **57.50**

HD-12/HPD-24, FOB . . . . . PD12S . . . . **99.50**

KIWI Post Driver, FOB . . . . . PDKS . . . . **57.50**

### Spring Ends (EACH)

HD-8/HPD-16, FOB . . . . . PD8E . . . . **2.00**

HD-10/HPD-20, FOB . . . . . PD10E . . . . **2.00**

HD-12/HPD-24, FOB . . . . . PD12E . . . . **17.00**

### KIWI Multi-Groove Droppers®

- White oak
- Cut every inch to accommodate almost any wire configuration

36", each, FOB . . . . . PMO36 . . . . **1.75**

Save on bundle of 25 . . . . . **40.00**

48", each, FOB . . . . . PMO . . . . **2.45**

Save on bundle of 25 . . . . . **57.50**

Use **Galvanized Dropper Clips** to secure wire to the dropper.

Dropper clips, 100/pk. . . . FC1 . . . **6.50**





## CCA-Treated Southern Yellow Pine Posts

Choose from warehouse locations in Pennsylvania, Indiana or Maryland. Other sizes available - call for pricing and availability.

Size	Code	Bundle	4 Bundle	Trailer
------	------	--------	----------	---------

### Non-Tapered Posts (FOB Maryland)

4" x 6.5', 75/bundle	P4X6.5PCM	5.21	5.02	4.83
4" x 7', 75/bundle	P4X7PCM	5.69	5.48	5.27
4" x 8', 75/bundle	P4X8PCM	6.30	6.07	5.84
4" x 10', 60/bundle	P4X10PCM	8.22	7.92	7.62
5" x 7', 50/bundle	P5X7PCM	7.40	7.13	6.86
5" x 8', 50/bundle	P5X8PCM	8.36	8.05	7.75
6" x 8', 40/bundle	P6X8PCM	10.75	10.36	9.97
6" x 9', 40/bundle	P6X9PCM	12.19	11.75	11.30

### Tapered Posts (FOB Maryland)

4-5" x 7', 60/bundle	P4X7TCM	5.69	5.48	5.27
4-5" x 8', 60/bundle	P4X8TCM	6.30	6.07	5.84
5-6" x 7', 45/bundle	P5X7TCM	7.40	7.13	6.86
5-6" x 8', 45/bundle	P5X8TCM	8.36	8.05	7.75
6-7" x 8', 30/bundle	P6X8TCM	10.75	10.36	9.97
6-7" x 9', 30/bundle	P6X9TCM	12.19	11.75	11.30

*Posts not available by the piece from MD warehouse. (bundles only)*

Size	Code	Each	Bundle	4 Bundle	Trailer
------	------	------	--------	----------	---------

### Non-Tapered Posts (FOB Blairsville, PA)

4" x 6.5', 75/bundle	P4x6.5PCP	6.62	6.17	5.94	5.72
4" x 7', 75/bundle	P4X7PCP	7.28	6.78	6.53	6.29
4" x 8', 75/bundle	P4X8PCP	8.09	7.54	7.26	6.99
4" x 10', 60/bundle	P4X10PCP	10.14	9.45	9.11	8.76
5" x 7', 50/bundle	P5X7PCP	9.44	8.80	8.48	8.16
5" x 8', 50/bundle	P5X8PCP	10.29	9.59	9.24	8.89

### Tapered Posts (FOB Blairsville, PA)

4-5" x 6.5', 60/bundle	P4X6.5TCP	6.62	6.17	5.94	5.72
4-5" x 7', 60/bundle	P4X7TCP	7.28	6.78	6.53	6.29
4-5" x 8', 60/bundle	P4X8TCP	8.09	7.54	7.26	6.99
4-5" x 10', 60/bundle	P4X10TCP	10.14	9.45	9.11	8.76
5-6" x 8', 45/bundle	P5X8TCP	10.29	9.59	9.24	8.89
6-7" x 8', 30/bundle	P6X8TCP	13.45	12.54	12.08	11.62

### Tapered Posts (FOB Earl Park, IN)

4-5" x 10', 60/bundle	P4X10TCE	9.20	8.58	8.26	7.95
4-5" x 7', 60/bundle	P4X7TCE	6.53	6.08	5.86	5.64
4-5" x 8', 60/bundle	P4X8TCE	7.56	7.04	6.78	6.53
5-6" x 8', 45/bundle	P5X8TCE	10.79	10.06	9.69	9.32
6-7" x 9', 30/bundle	P6X9TCE	15.29	14.25	13.73	13.21



**Poplar Board Fence** is ideal if you want a rustic wood fence look. It is easy to install and repair. Life expectancy is not as long as other fence types such as wire or Horserail. Using an offset electric wire to prevent cribbing may extend the life. ACQ-treated, FOB Blairsville, PA only

Size	Code	Each	Bundle	4 Bdl	Trailer
1" x 6" x 16', 105/bdl.	PB16	8.01	7.47	7.19	6.92

## Propane T-Post Driver

The Tippmann Propane Hammer is the easiest and most convenient t-post driver on the market. Using a standard 14 oz propane tank, it delivers 700lbs of driving force. Drives posts up to 2 5/8" diameter in any soil condition. Use with t-posts, sign posts, ground rods, wood posts and more. Propane Hammer, FOB . . . TPDPH . . . **1995.00**



## Galvanized T-Posts

- Studded
  - Hot-dip galvanized
  - Bottom plate ensures driving stability and post alignment
- 5 ft, FOB . . . . . PT5P . . . . . **6.75**  
 6 ft, FOB . . . . . PT6P . . . . . **8.10**  
 7 ft, FOB . . . . . PT7P . . . . . **9.45**  
 8 ft, FOB . . . . . PT8P . . . . . **10.80**  
 10 ft, FOB . . . . . PT10P . . . . . **13.50**  
 11 ft, FOB . . . . . PT11P . . . . . **14.85**  
 12 ft, FOB . . . . . PT12P . . . . . **16.20**



## T-Post Pounder

- Large, easy-to-grip handles
- Works in virtually any type of soil
- HD metal construction

Standard, FOB . . . . . TPR . . . . . **19.95**  
 Spring-loaded, FOB . . . . . TPD . . . . . **39.75**



**T-Post Puller/Driver** removes posts easier than traditional pullers. The driver is mounted onto the post instead of the top so there is no damage to the post and no need for ladders. Reverse hammer action breaks posts free to quickly remove t-posts. Ideal for tall posts - keeps posts straight. Hardened alloy steel. **Free Shipping!**

T-post Driver/Puller . . . TPDP . . . . **159.75**



See Video Online



**T-Post Clips** are galvanized and ideal for securely attaching wire to metal t-posts. Clips, 25/pk . . FTC . . **1.75**

## The Little Mighty Man T-Post Puller

- Removes old posts quickly
  - Use with FEL or 3-point hitch
  - Fast and easy to use
- Little Mighty Man, FOB . . . . TTMM . . . . **24.95**



## Safe-T-Post Caps™

- Protects animals from sharp edges
  - Increases visibility
  - Conforms to wide range of steel post sizes
  - UV-resistant material
- Safe-T-Post Cap, 25/pk . . . . . PTC . . . . . **8.75**



## Wedge-loc Bracing System

T-post bracing hardware is designed to quickly erect end and corner assemblies. Fits all steel t-posts. Solid, rust-free aluminum.

- Universal collar . . . . . HWC . . . . . **1.60**  
 Heavy Wedge to lock collars . HWW . . . . . **1.60**  
 60 degree Socket . . . . . HW6 . . . . . **1.45**  
 90 degree Socket . . . . . HW9 . . . . . **1.45**  
 Gate Hinge . . . . . HWG . . . . . **19.75**





## Sure-Latch Two-Way Gate Latch

- Simple to install
- One-handed operation
- Allows gate to open either direction
- Fits all tube gates with 1 5/8" - 2" O.D. round tube

Sure-Latch Gate Latch . . . . . GLL . . . . . **16.75**



## Jr Sure Latch

- Fits gates with 1 1/4" - 1 1/2" O.D. round tube
- Can be padlocked
- One-handed operation



Jr Gate Latch . . . . . GLJR . . . . . 16.25



## One Way Latch

- Fits gates with 1 5/8" - 2" O.D. round tube
- Prevents gate end from sagging or swinging
- Can be padlocked
- One-handed operation



One Way Latch . . . . . GL1 . . . . . **16.95**

## Chain Gate Hook

- Rugged spring-loaded clasp
- Holds hook securely
- Large enough to easily grip to release

*Includes 13" chain and oversized staple*

Chain Gate Hook . . . . . GNZL . . . . . **11.50**

## Chain Gate Hook

- Spring loaded locking ring and quick-link
- Designed for easy one-handed operation
- Galvanized hook/chain
- Includes 3" staple



Chain Gate Hook, economy . . . GNZLC . . . **7.75**



**Gate Wheel** helps take the work out of opening and shutting heavy gates. The end post is not stressed with having to support the weight of the gate. Bolts onto 1 5/8" to 2" round tube gates.



Gate Wheel . . . . . GW2 . . . . . **19.50**



## Gate Anchor

- Holds gate open in any position while you drive, walk or run livestock through
- Prevents gate end from sagging or swinging
- Use horizontally as a slide latch
- Fits 1 5/8" - 2" tube gates



Gate Anchor . . . . . GLA . . . . . **14.50**

## 12" Gate Hinge Bolt

3/4" diameter bolt and hinge pin, with 2 nuts and washers to allow easy adjustment of the gate.



12" Gate Hinge Bolt, FOB . . . . . GHB . . . . . **7.75**



## 12" Locking Gate Hinge Bolt

Secures bolt to post to prevent rotating hinge.

- Ideal for long or heavy gates
- Hot-dip galvanized
- Includes 2 nuts and washers

3/4" x 12", FOB . . . . . GHBX . . . . . **11.75**

5/8" x 12", FOB . . . . . GHBX5 . . . . . **10.50**

## Bolt-on Hinge Clamps

- Galvanized
- Fits 3/4" hinge bolt pins

For 1.5" tube gates, FOB . . . . . GH15 . . . . . **4.95**

For 2" tube gates, FOB . . . . . GH2 . . . . . **4.95**







**GR8**

## 2" Tube Gates, 50" height

- Extremely durable
- Hot-dip galvanized after fabrication
- Welded chain slot-type catch
- Includes two 12" x 3/4" gate hinge bolts and 2 hinge straps. A chain (not included) can easily be used to hold gate open or closed

FOB Blairsville, PA

4 ft	GR4	70.15
6 ft	GR6	105.25
8 ft	GR8	140.25
10 ft	GR10	165.75
12 ft	GR12	197.65
14 ft	GR14	229.50
16 ft	GR16	261.40
18 ft	GR18	293.25



**GDG10**

## 8 ft Deer Gates

- Hot-dip galvanized after fabrication
- 4" x 4", 6 gauge welded mesh panels
- Saddle notched for superior strength
- Includes three heavy-duty hinges with 12-inch bolt hook

FOB Blairsville, PA

4 ft	GDG4	153.60
6 ft	GDG6	173.95
8 ft	GDG8	211.80
10 ft	GDG10	233.30
12 ft	GDG12	270.25
14 ft	GDG14	293.15
16 ft	GDG16	332.40
18 ft	GDG18	370.50



**GRL8**

## 1 5/8" Diameter Tube Gates

- 6-rail, 50" height
- Hot-dip galvanized after fabrication
- Plastic plugs in the vertical tubes
- Hardware package includes two 12" x 3/4" gate hinge bolts and 2 clamps

FOB Blairsville, PA

4 ft	GRL4	47.50
6 ft	GRL6	67.50
8 ft	GRL8	87.50
10 ft	GRL10	114.75
12 ft	GRL12	136.35
14 ft	GRL14	162.00
16 ft	GRL16	182.25
18 ft	GRL18	202.50



**GRW8**

## Mesh Wire Gates

- Hot-dip galvanized after fabrication
- 2" x 4" spacing of welded wire
- 50" height
- Ideal for horse and sheep fence
- Includes two 12" x 3/4" gate hinge bolts and two clamps

FOB Blairsville, PA


4 ft	GRW4	54.00
6 ft	GRW6	74.25
8 ft	GRW8	98.55
10 ft	GRW10	118.80
12 ft	GRW12	137.70
14 ft	GRW14	159.30
16 ft	GRW16	182.25
18 ft	GRW18	209.25



**GSLW**

**White Spring Gates** have an electrically-conductive powder coating. The white coated spring is more visible and has corrosion protection. Visibility, easy installation, and the versatility of gate sizes make these a great value.

- Up to 14 ft ..... GSCW ..... **8.95**
- Up to 24 ft ..... GSLW ..... **9.95**
- 14' Replacement spring ... GSCWS ... **6.75**
- 24' Replacement spring ... GSLWS ... **7.75**

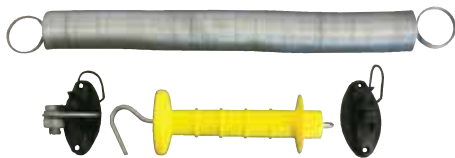

## Spring Gate

- Large diameter spring
- Retracts to two feet
- Galvanized for long life
- Includes non-slip handle, two insulators and hookup system

- Up to 14 ft ..... GSC ..... **8.95**
- Up to 24 ft ..... GSL ..... **9.95**
- 14' Replacement spring ..... GSCS ..... **6.75**
- 24' Replacement spring ..... GSLs ..... **7.75**

## Extra Large Spring Gate Kit

Includes 2 1/4" diameter galvanized spring, one polycarbonate gate handle, 2 pin-lock insulators and handle hookup (GHU3).


- Extra Large 16 ft Kit ..... GSCXX ..... **13.75**
- Replacement spring ..... GSCXS ..... **10.25**



## Stainless Steel Spring Gates

- Rust-proof
- Stainless polycarbonate handle
- 3-hole handle hook-up set

- Up to 14 ft ..... GSSC ..... **13.50**
- Up to 24 ft ..... GSSL ..... **16.00**
- 14' Replacement spring ..... GSSCS ..... **8.50**
- 24' Replacement spring ..... GSSLS ..... **11.00**

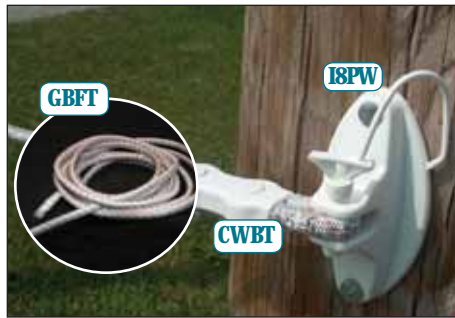

## Build your own Electric Bungee Gates!

White with red stripes bungee cord, 6 x .2mm stainless steel wires, approximately 1/3" diameter. Stretches to more than double its original length, buy only 75% of the length of your gate. Sold by the foot.

- Bungee rope, per ft. .... GBFT ..... **0.39**
- Wire splice clamp, 3/pkg ..... CWBT ..... **2.55**
- Pin-lock Insulator, 25/pkg. .... I8PW ..... **6.50**

## Electric Bungee Gate

- Stays off the ground while gate is open
- Elastic cord stretches up to 20 feet
- Safer and more visible than spring gates
- Includes gate hook-up



- Electric Bungee Gate ..... GSR ..... **9.95**



## Drive-thru Electric Gates

- Spring-loaded
  - Adjustable lengths
  - Save time, aggravation, and money
- 13-19 ft, FOB ..... GDTS ..... **149.50**
  - 18-24 ft, FOB ..... GDTL ..... **159.50**
  - Replacement FG rods ..... GDTXR ..... **6.95**
  - Replacement streamers ..... GDTXS ..... **21.50**
- (includes hoses)*



**New Zealand Gate Handle**

- Galvanized expansion spring
  - More tolerance for gate post movement
- NZ gate handle, white . . . . . GNCW . . . **2.95**  
 NZ gate handle, yellow. . . . . GNC . . . . . **2.95**



**Polycarbonate Handle**

Two steel rods inside the spring handle give excellent holding strength without stressing the insulating plastic. Durable, high-quality polycarbonate.

Polycarbonate Gate Handle . . . . . GPC . . . **3.95**



**Economy Plastic Handle**

- Compression spring
  - Wire attaches easily
- Economy handle . . . . . GPE . . . . . **2.50**

**“Old Ironsides”  
HD Gate Handle**

- Extremely durable
- Tough insulating grip
- Heavy duty spring



*This handle cannot be used with (GHU) hookup*

Old Ironsides, black . . . . . GHD . . . . . **5.25**



**Rubber Gate Handles**

- Soft rubber casing
  - Heavy stamped steel plated hook
  - Stretches to 3.5”
- Rubber gate handle. . . . . GRB . . . . . **2.10**



**Stainless Polycarbonate Handle**

- Insulated spring handle
  - 2 stainless tension rods for extra strength
- Stainless handle . . . . . GPCS . . . . . **5.95**



**Non-conductive Plastic Gate Handle**

Use with electric twine or ribbon. Connect to a grounded or hot wire and electrify after the portable fence is built.

Non-conductive handle . . . . . GPL . . . . . **1.15**



**The New Zealand Handle Hookup Set**

includes pin-lock insulator, two hole hook-up plate and a split-bolt line tap.

NZ hook-up set . . . . . GHU . . . . . **1.75**



**The Insulated Double Loop Handle Hook**

is designed for use where T-posts terminate rope or tape fence. One loop holds the fence while the other holds the gate handle.

Double-loop hookup, wood . . . GHUD . . . . . **1.55**  
 Double-loop hook, t-post . . . . . JTR . . . . . **2.95**



GHU3S



GHU3

**3-Hole Handle Hookup Set**

Allows split bolt to connect wire to either outside hole and still have room for 2 gate handles.

Galvanized Handle Hookup . . . GHU3 . . . . . **1.75**  
 Stainless Handle Hookup . . . . . GHU3S . . . **3.25**

# Electric Fence



## Kencove Farm Fence **ELECTRIC NETTING**

Kencove Electric Netting has smaller spacing at the bottom to provide extra security. Semi-rigid vertical stays help prevent sagging. All nets include repair kit and four corner stakes.

- 15 step-in posts built into the fence
- Stainless steel conductors for durability
- Fast and easy to set up and move

<b>7" Stay Spacing, 164'</b>	<b>Made in the USA</b>	<b>Pos/Neg*</b>	<b>Orange</b>	<b>Green</b>	<b>Price</b>
40" Height, 9 lines, Sheep/Goat .....		NSG	NSGG		<b>137.50</b>
40" Height, 12 lines, Sheep/Goat/Poultry .....		NSG12X			<b>151.75</b>
48" Height, 14 lines, Dog/Duck/Goat .....			NP7	NP7G	<b>151.75</b>
48" Height, 14 lines, Dog/Duck/Goat .....		NP7X			<b>161.25</b>
<b>3.5" Stay Spacing, 164'</b>	<b>Made in the USA</b>	<b>Pos/Neg*</b>	<b>Orange</b>	<b>Green</b>	<b>Price</b>
40" Height, 10 lines, Poultry/Goats .....			NSPC	NSPCG	<b>149.75</b>
48" Height, 14 lines, Poultry/Goats .....			NPC	NPCG	<b>179.75</b>
48" Height, 14 lines, Poultry/Goats .....		NPX			<b>189.75</b>

**\*Pos/Neg:** For dry regions, or for ultimate control, we recommend positive-negative (+/-) netting. In this system the animal completes the circuit through the net. This greatly improves performance of the fence in poor grounding conditions.

**FREE SHIPPING**  
On All Electric Netting

### Stafix Dual-Purpose Unigizer™

is a universal energizer used as either an AC-powered or 12-volt battery unit. Battery lead set and mains power adapter included. Indicator lights show output voltage and battery condition. Made in New Zealand.

- Day/night sensor
- Adjustable pulse speeds
- Two year warranty



Stafix X1 .....	EXD1 .....	<b>110.70</b>
Stafix X2 .....	EXD2 .....	<b>157.20</b>
Stafix X3 .....	EXD3 .....	<b>185.10</b>
Stafix X6 .....	EXD6 .....	<b>333.90</b>

20

### Single spike posts now available!

For rocky or hard soils, single spike posts may be easier to install. To order any of the nets above with single spike posts, add an "S" to the end of the code. Example: NSG = 9/40/7 net with double spike posts; NSGS = single spike posts

### Need a shorter length?

As part of the manufacturing process, we create random length nets. This is a great way to save money if you don't need a full 164 foot roll. Call for price and availability.

### Stafix Dual-Purpose Unigizer™ with remote control

This unit includes all the features of the X6 plus a backlit LCD screen, adjustable power, earth monitoring, and a remote control. Portable enough for temporary fencing but powerful enough to control the largest domestic livestock. Free shipping!



Stafix X6i .....	EXD6R .....	<b>529.20</b>
------------------	-------------	---------------

On All Chargers



### Parmak Magnum 12 Volt Solar

- .5-joule output
- Voltage meter
- Durable steel case
- Includes battery
- Two year warranty



Magnum 12v Solar Energizer . . EMS . . . **299.00**



### Kencove Portable Battery Energizers

Battery LED light flashes red when battery power is low. A second LED indicator monitors the condition of the fence and flashes green when voltage is above 2500 volts. Easily adjust power for your specific application.

- Easy-to-carry handle
- Made in Germany
- Three year warranty

Kencove Portable 2-Joule . . . EKB2P . . . **189.75**

Kencove Portable 3-Joule . . . EKB3P . . . **219.75**

Trickle Charger . . . . . MTCES2 . . . **19.85**

10w Solar Panel Kit, FOB . . . EKBS10 . . . **197.50**

18w Solar Panel Kit, FOB . . . EKBS18 . . . **395.00**

25w Solar Panel Kit, FOB . . . EKBS25 . . . **445.00**



### Parmak Mains Energizers

- 110-120v AC powered
- Indoor installation
- Low impedance
- One year warranty
- Digital display shows peak voltage



Parmak Mark 7, 1 joule . . . . . EM4 . . . . . **129.95**

Parmak SE4, 2.2 joule . . . . . EM1 . . . . . **149.75**

### S200 12 Volt Solar Energizer

- .2-joule output
- Includes ground stake
- Three year warranty
- Port for plug-in charging

*(Charger/adaptor sold separately.)*

**Operates up to 2 weeks with no sun!**



S200 12-Volt Solar . . . . . ES2 . . . . . **225.75**



### Yellow Jacket

- .25-joule output/12v input
- Mount directly to ground rod
- Easily hung from wire or twine
- Portable and easy to use
- One year warranty

Yellow Jacket. . . . . ECY . . . . . **87.50**



### The Kencove Digital Energizer

is a four joule unit featuring a digital display that tells you voltage on the fence while another digital display shows voltage lost due to shorts and load on the fence line. A flashing light either red or green lets you

know from a distance if you have a problem. Set output to full or half power with knobs conveniently mounted on the bottom of the unit. Made in Germany. Three year warranty.

Digital Energizer, 4-joule . . . EK4D . . . **195.50**

### Kencove Plug-in Energizers

Two diagnostic LED lights let you know from a distance if you have a problem. The fence indicator light flashes green when voltage is above 3500v and red when fence voltage falls below 3500v. The ground LED flashes green when voltage on grounding system is below 1000v. Made in Germany. Three year warranty.



Kencove 1.5-joule output . . . . . EK2 . . . **109.50**

Kencove 4-joule output . . . . . EK4 . . . **149.50**

Kencove 6-joule output . . . . . EK6 . . . **169.75**

Kencove 8-joule output . . . . . EK8 . . . **199.75**

# Electric Fence



## Stafix Remote Control Energizers

- Cyclic Wave and Bi-Polar technology
- Ideal for high vegetation growth
- Made in New Zealand
- Two year warranty
- 110-120v AC powered



M6R, 6-joule with remote	EXD6R	529.20
M15R, 15-joule, remote ready (sold separately)	EX15RR	685.75
M15R, 15-joule, with remote	EX15R	819.75
M20R, 20-joule, remote ready (sold separately)	EX20RR	875.75
M20R, 20-joule, with remote	EX20R	999.75
M36R with remote, 36-joule	EX36R	1295.75
Remote Control Fence Compass	VPXR	190.65

**FREE SHIPPING**

The **Kencove 6Z** is a powerful six joule charger. Overall the components are heavier built than most American chargers. The real power shows up in large heavily weeded fences. A storm guard comes free with the charger and is required to be operational for the lightning warranty to be in effect. The storm guard is not guaranteed. Includes one year warranty. A second year warranty, including lightning, is available for \$40. 110/120v AC powered.



Made in the USA

Kencove 6Z .....EK6Z..... **195.50**

## Zareba 15 Mains Energizer

With fifteen output joules, this unit shocks through heavily weeded fences. The one year warranty covers lightning damage (storm guard must be installed). Plastic case allows for easy module replacement. Ideal for long, multi-strand fences.



**Our most powerful American-made unit!**

- Free storm guard
  - Low impedance
  - One year warranty
- Zareba 15 ..... EK15 ..... **339.50**



## Quik-Ground

- 3 ft ground rod
- Attached driver
- Hot-dip galvanized
- Easy to install and remove ground rods
- Ideal for use with portable electric fence

Quik-Ground, FOB ..... MGQ ..... **14.25**



## Grounding Kit

includes three 5/8" x 6ft galvanized ground rods, 3 clamps, and 50' soft Galfan wire. An easy way to have everything at hand to install your ground system.

Grounding Kit, FOB ..... MGK6 ..... **35.95**

MGCB2  
MGCB3  
MGCB5



MGCU



## Ground Rod Clamps

Bronze 1/2"	MGCB2	1.35
Bronze 5/8"	MGCB5	1.35
Bronze 3/4"	MGCB3	1.55
Universal, 1/4" - 1 1/4"	MGCU	1.35

## Ground Wire

Copper 6 gauge	MGWFT	0.95/ft
Stainless 11.3 gauge	DSCFT	0.24/ft

## Galvanized Ground Rods

1/2" x 3', FOB	MG3	4.75
1/2" x 58", FOB	MG5	6.75
1/2" x 6', FOB	MG6	7.75
5/8" x 5', FOB	MG5HD	7.25
5/8" x 6', FOB	MG6HD	8.75
5/8" x 8', FOB	MG8HD	9.75

**Most Popular**



## Choke Coil and Lightning Diverter Combination

is attached to a post between the fence wire and the charger. The spark gap is adjustable and much larger to make it especially sensitive and effective.  
Diverter/Choke Coil. . . . . MWLA . . . . . **8.50**

## Energy Limiter/ Flood Gate Controller

Automatically reduces power to attached lines during flood or high vegetation growth. Wire will automatically become hot again when the short is sufficiently reduced.  
Energy Limiter. . . . . MEL . . . . . **17.50**



## Porcelain Lightning Diverter

- Protects energizer from lightning damage
- Simply attach fence wire to one terminal and ground wire to independent ground rods.
- One time use only



Porcelain diverter . . . . . MLA . . . . . **5.95**  
Recommended choke coil. . . . . MLC . . . . . **13.50**

## Koltec Lightning Arrestor

- Weatherproof
- Attach directly to fence wire and fasten to post
- Includes mounting bracket



Koltec lightning arrestor . . . . . MLAI . . . . . **13.25**  
Recommended choke coil. . . . . MLC . . . . . **13.50**



## Power Connectors

- Use instead of a switch or to connect electric twine to a permanent electric fence
- 2-clip jumper, 4' wire . . . . . MPC . . . . . **6.95**
- Clip only, red . . . . . MPCCR . . . . . **1.95**
- Triple jumper leads. . . . . MPC3 . . . . . **12.95**
- 1 Clip, 48", terminal end . . . . . MPCT . . . . . **6.95**

## Kencove HD Double Cut-Out Switch

Uses the advantages of easy hook-up of the (CBT) Split Bolt Tap with the contacts which are independent of the knife pivot. This can easily be changed to a double throw switch.  
Kencove HD switch. . . . . MCDHD . . . . . **6.50**



## Heavy-Duty Single Throw Cut-Out Switch

- Two sets of stainless contacts
- Stainless steel knife Pivot bolt for knife is not an electrical contact which allows easier movement of the knife.

Heavy duty switch . . . . . MCCHD . . . . . **6.50**



## Swivel Cut-Out Switch

- Contacts protected from adverse weather
- Stainless steel knife and contacts
- Spring tightened

Swivel cut-out switch. . . . . MCP . . . . . **10.75**



## Power Surge Protector

Designed to provide protection from power spikes and surges up to 6000 volts.

Power surge suppressor . . . . . MPS . . . . . **5.75**

## Stafix Fence Alert™

- Flashes when voltage drops below preset levels
- Clips securely to fence line
- 2 voltage settings
- Up to 5 years battery life



Fence Alert. . . . . MFA. . . . . **19.55**




## Kencove's 5-Light Tester

Indicates voltage level on the fence line. Rugged and easy to use.

5-Light Tester. . . . . V5L . . . . . **9.75**

# Electric Fence

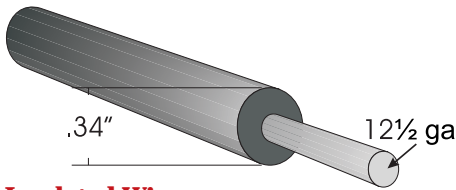

## Insulated Wire

The use of household electrical wire is not recommended for use with fence chargers due to low voltage ratings. The 12 1/2 gauge wire lasts longer and conducts better than 16 gauge.

## 12 1/2 Gauge Single Wall

### Insulated Wire (.34" diameter)

50'	.....GU50	..... <b>9.00</b>
100'	.....GU100	..... <b>18.00</b>
250'	.....GU250	..... <b>45.00</b>
500'	.....GU500	..... <b>90.00</b>

### Double Insulated Wire (.25" diameter)


165', 16 gauge	.....G16	..... <b>22.00</b>
330', 16 gauge	.....G33	..... <b>40.00</b>
165', 12 1/2 gauge	.....G65	..... <b>37.50</b>
330', 12 1/2 gauge	.....G32	..... <b>70.00</b>

## Visit us online

Fence troubleshooting articles and installation tips on the web at [www.kencove.com](http://www.kencove.com)

## Double Lead-Out Wire

- Two 12.5 gauge soft steel wires in UV-stabilized sheath
- Use to run hot and ground wires from energizer

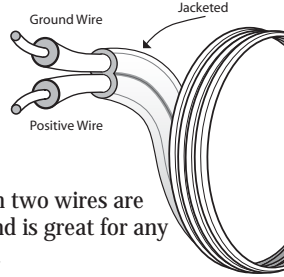

Can also be used when two wires are needed under gates and is great for any ground return system.

82' coil	.....GD82	..... <b>44.50</b>
330' coil	.....GD330	..... <b>169.50</b>

## Insultube

- Take electrified wire under gates by putting 12.5 gauge high-tensile wire through the tube
- Long tube insulators can be cut to length
- ID: .16", OD: .36"

*Not recommended for insulating corner posts (see Wraparounds)*

50' coil	.....G05	..... <b>7.95</b>
100' coil	.....G10	..... <b>14.95</b>
250' coil	.....G25	..... <b>35.95</b>
500' coil	.....G50	..... <b>68.95</b>

## FENCE-FLAG® with K-CLIP®

- Increases visibility of line wires
  - Flutters with slightest breeze
  - Suspended on SS K-clip®
- FENCE-FLAGS® 12/pk ...MFF .. **4.65**



## K-CLIP®

- Quickly and easily installed!
  - Stainless steel spring temper
  - Securely hang warning signs
- K-CLIPS® only, 50/pk. . . MFC .. **8.00**



## Kencove Warning Sign

- Printed both sides
  - 6 holes for hanging or nailing
  - 7.5" x 4.75"
- Kencove Warning Sign . . . . . MFSP . . . . . **0.95**

## Clip-On Electric Fence Sign

- Two plastic clips to attach to fence wire
  - 5 pre-drilled holes to hang with nails
  - Printed on both sides
  - 8.5" x 4.5"
- Clip-on fence sign . . . . . MFS . . . . . **1.99**



## Kencove Aluminum Warning Sign

- Large black letters
  - 12" x 4"
- Unique notching system secures sign onto any fence wire. Printed both sides.
- Kencove aluminum sign. . . . MFSK . . . . **2.75**



## The Electric Fence Tester

- Digital readout of fence voltage, the amperage flow and direction of the short
- One touch operation
- No clips or wires

Fence Tester . . . VPP . . . **119.50**



## Lag Screw Offset Insulator

- 7" offset from post
- Designed to give better strength and electrical insulation

Gooseneck, 9", 10/pk . . . . . IWR6 . . . . . **9.95**

## Economy Lag Corner Insulator

- Ideal for electric rope and twine
- L-shaped 1/4" diameter lag screw

Lag Corner, black, Each . . . . . ILCE . . . . . **1.25**



## Donut Insulators

A set of donuts bolted between strips can be tied to an anchor in a sharp dip to eliminate a dip post. Do not use Porcelain Donut in high tension applications.

Porcelain donut, each . . . . . IPD . . . . . **0.37**

Plastic donut, black . . . . . ILD . . . . . **0.55**

Donut insulator, white . . . . . ILDW . . . . . **0.59**



## Bull Nose

- Fiberglass reinforced for added strength
  - Ideal for any end or corner application
- Reinforced, white . . . . . I4UW . . . . . **0.85**

## Economical I4LB

- For lower tension applications and smaller gauge wire
- Economical, black . . . . . I4LB . . . . . **0.47**

## The Fence Compass™

Digital readout shows fence voltage, amperage flow and direction of the current.

- Large backlit LCD screen
- Audible beep
- Water resistant case
- Memory of last reading

*Not for use with high-impedance fence chargers.*

Fence Compass™ . . . . . VPX . . . . . **122.75**



## Kencove Digital Voltmeter

- Reads up to 9900 volts
- Easy-to-read LCD display
- 9-volt battery (included)



*The most accurate fence meter we have tested.*

Kencove Digital Voltmeter . . . VSXK . . . **39.75**



**ILC**



**ILCW**

## Lag Corner Insulator

Ideal for high-tensile wire, coated wire, or any application where additional strength is required.

- L-shaped 3/8" diameter zinc plated lag screw with nylon/lock nut
- UV-stabilized high grade plastic

Lag corner insulator, black . . . ILC . . . . . **1.30**

Lag corner insulator, white . . . ILCW . . . . . **1.37**



## Double "U" Insulators

- Use on end and corner posts
- Embedded metal in the plastic
- Ideal for all smooth high-tensile wire

Double U, 10/pk . . . . . I46 . . . . . **6.00**

**More products and installations tips  
online at [www.kencove.com](http://www.kencove.com)**

# Electric Fence



**I8PW**



**I8P**

## Kencove's Pin-lock Insulators

- Large spark flange around the base
- Wire is held farther away from the post
- Removable pin

Our most versatile pin-lock insulators work with high-tensile, rope and Hotcote.

Pin-lock Insulator, black, 25/pk . . . I8P . . . **6.25**

Save on 24 packs . . . . . **5.75**

Pin-lock Insulator, white, 25/pk. . . I8PW . . . **6.50**

Save on 24 packs . . . . . **6.00**

## Water Shed Insulator

An economical way to insulate 12.5 gauge wire. Simply staple to wood post. *Staples sold separately.*

Water Shed Insulator, 100/pk. . . . IWS . . . **9.75**



**ICCW**



**ICCB**

## "Claw" Style Insulator

- UV-stabilized heavy duty plastic
- Extremely versatile!
- Can be used with high-tensile, Hotcote, electric rope, ribbon or electric twine.

Claw insulator, black, 25/pk. . . . ICCB . . . **6.95**

Claw insulator, white, 25/pk . . . . ICCW . . . **6.95**

Stafix, green, 25/pk. . . . . ICW . . . **6.95**

*Stafix Claw Insulator (ICW) for use with high-tensile only; does not accommodate coated wire.*



**I48**

**I53**

## Flat Back 4" Tube Insulator

- High quality plastic
- Ideal for square posts
- Economical and easy to use

4" Flat-back, 200/pk . . . . . I53 . . . . . **9.75**

6" Flat-back, 200/pk . . . . . I53-6 . . . . . **14.50**

8" Flat-back, 25/pk . . . . . I53-8 . . . . . **2.75**

## Heavy Wall Tube Insulator

- Extra protection from shorts
- Less in-line friction
- .23" ID, .55" OD

Use 6" lengths for line and bend posts

Heavy wall tube, 100 ft . . . I48-100 . . . **45.00**

6" Heavy wall tube, 50/pk . . I48-6PK50 . . . **9.50**



## 4" Fin Tube Insulator

Staple anchors into the fins on the tube to prevent sliding. UV-stabilized to resist weathering

4", 2-flange, 200/pk . . . . . I50 . . . . . **9.75**

## 1/4" Stainless Steel

### Wood Screws

with square heads are a secure, attractive, and portable method of attaching insulators.

Get one pack for every pack of insulators. Stainless Steel is highly recommended when using ACQ and Natural Select treated lumber.

1/4" SS screws, 50/pk . . . . . HSS175 . . **3.50**

Square head drive bit, 2/pk . . . TDBS . . . **1.75**



## Heavy Zinc-Plated

### 1/4" Wood Screws

are quick, easy and economical to use, with Phillips head drive.

1/4" wood screws, 50/pk . . . HSG125 . . **1.95**



## Screw-In Ring Insulator

- Heavy screw base
- UV-stabilized
- Ideal for use with all wood posts

3", black, 25/pk . . . . . IRI2 . . . . . **4.95**  
 3", white, 25/pk . . . . . IRI2W . . . . . **5.25**  
 6", Offset, black, Each. . . . . IRI6 . . . . . **0.62**



## Ring Insulator Installation Tool

Install screw-in insulators in seconds! Turned in with a low speed battery powered drill.

*(Cannot be used with IWR6)*

Ring Insulator Installation Tool  
 TRI. . . . . **4.50**



## Wraparound T-Post Insulator

- Secures with 3-point contact around post
- Fits 1.25 - 1.31 lb/ft t-posts
- Holds wire 1" from post

Snug Insulator, white, 25/pk . . . IS1W . . . **4.00**



## Ring Insulator

- Use with rope, high tensile wire or twine
- UV-stabilized heavy duty plastic

Ring Ins, 25/pk . . . . . IRT . . . . . **9.25**

## Stafix Pin-lock Insulator

- Nail to wood posts or snap onto steel t-posts
- Self-locking pin
- UV-stabilized plastic

*For use with smooth wire only*

Stafix Pin-lock, green, 25/pk. . . . IPTL. . . . **9.25**



**The Wraparound Insulator** is one of the simplest end or corner insulators to install. An aluminum insert keeps the wire from cutting through the plastic. They must be slid onto the end of the wire when the line post insulators are placed on the wire. Do not staple too tightly. A staple placed above and below the wraparound is best.

20", 10/pk . . . . . I40. . . . . **7.00**  
 24", 10/pk . . . . . I40-24 . . . . . **8.50**  
 30", 10/pk . . . . . I40-30 . . . . . **10.50**  
 100', coil . . . . . I40-100 . . . . . **45.00**  
 24" white, 10/pk . . . . . I40W-24 . . . . . **11.50**  
 24" Heavy Wall, 10/pk . . . . . I48. . . . . **7.00**

## Cap'R Insulator

Nail onto top of wood posts or fit onto steel t-posts.

Holds wire rope and up to 1.6" wide ribbon and tape. Adds safety and visibility.



Black, 10/pk. . . . . ITPCB . . . . . **8.25**  
 White, 10/pk . . . . . ITPCW . . . . . **8.25**



## Kencove 5.5" Offset T-Post Insulator

- Heavy duty UV-resistant plastic
- Pin-lock holds rope, twine or wire
- Fits most sizes of t-posts

Easy to install - simply slide over t-post and secure with pin.

5.5" Offset, 10/pk, black . . . . IT6B . . . . **7.75**  
 5.5" Offset, 10/pk, white . . . . IT6W . . . . **7.75**

# Electric Fence



## Pin-lock Insulator

Holds larger diameter products like Hotcote and rope. Nail onto wood posts, or snap onto t-posts to securely insulate electric wires. UV-stabilized plastic resists weathering.

Our most versatile pin-lock insulator!

Pin-lock Insulator, 25/pk. . . . . ITE . . . . . **5.95**

## Claw T-Post Insulator

Secures to t-post with wraparound, three-point contact.



Ideal for large diameter products like rope and Hotcote. Works with all sizes of t-posts high-density polyethylene.

Black, 25/pk . . . . . IRTC . . . . . **7.25**

White, 25/pk . . . . . IRTCW . . . . . **7.25**



## 12" Offset Bracket

- Easy to attach with a screw driver onto 2 separate lines of smooth or woven wire.
- Great insulation from the bracket wire

Offset Bracket, 25/pk . . . . . I6X . . . . . **40.00**



**Fiberglass Offset Insulators** are one of the lowest cost options. A spring clip is required to support the wire (*sold separately*). 12" length

Fiberglass Rod, 3/8" . . . . . IOR . . . . . **0.50**

Fiberglass Rod, 5/8" . . . . . IORHD . . . . . **0.65**

3/8" SS Clip . . . . . F3S . . . . . **0.17**

5/8" SS Clip . . . . . F5S . . . . . **0.20**

## Plastic Pigtail Clip

- Excellent insulator for 3/8" metal or fiberglass rods
- Safe - no protruding metal ends



Pigtail clip, 50/pk . . . . . F3P . . . . . **11.50**



## Pigtail Insulator

**easy to install**

- 10" offset
  - Galvanized high-tensile wire
  - Long-life UV-stabilized polymer coating
- Use on an existing fence or to keep livestock a safe distance away from new fence.

Pigtail, 10" offset . . . . . I6Z . . . . . **1.90**



**Back-Side Insulator** fits standard chainlink and t-posts from 1 1/4" - 1 3/8". Easy front end loading feature accommodates all wire sizes and types.

Back-Side T-Post, black, 25/pk . . . . . IBS . . . . . **9.50**

## Chain-link Offset Insulator

supports electrified wire 4.5 inches away from the fence. Can also be used on t-posts.



Chain-link Offset, 10/pk . . . . . ICLOFFSET . . . . . **8.25**



## Screw-Tight Rod Post Insulator

- Use with 3/8" - 1/2" rods
- Accommodates up to 1/4" diameter rope
- UV-stabilized

White, 25/pk . . . . . IRPW . . . . . **4.95**

Yellow, 25/pk . . . . . IRPY . . . . . **4.95**

## Slide-On Twine Insulator

- Fits 3/8" diameter posts
- Easy to use design
- Holds electric twine or up to 16 gauge wire



Slide-on Insulator, 50/pk. . . . . IRP3 . . . . . **13.50**

## Stainless Steel Rod Clip Long Tail

3/8", each . . . . .	F3S . . . . .	<b>0.17</b>
3/8", 50/pk . . . . .	F3SPK50 . . . . .	<b>7.25</b>
3/8" 100/pk . . . . .	F3SPK100 . . . . .	<b>13.75</b>
1/2", each . . . . .	F2S . . . . .	<b>0.17</b>
5/8", each . . . . .	F5S . . . . .	<b>0.20</b>
2/3", each . . . . .	F23S . . . . .	<b>0.20</b>
3/4", each . . . . .	F34S . . . . .	<b>0.20</b>
7/8", each . . . . .	F7S . . . . .	<b>0.20</b>
1", each . . . . .	F1S . . . . .	<b>0.25</b>



## Cotter Pins

14 gauge, 5", 100/pk. . . . .	FCPCH . . . . .	<b>5.95</b>
12.5 gauge, 5.5", 100/pk. . . . .	FCPCR . . . . .	<b>5.95</b>



## 3/8" Galvanized Spring Steel Clip

50/pk . . . . .	F3CPK50 . . . . .	<b>5.95</b>
100/pk . . . . .	F3CPK100 . . . . .	<b>10.75</b>

## SunGuard™ Fiberglass Posts

- Lightweight yet durable
- Flexes on impact
- Won't rot or rust

Bundles of 20 SunGuard™ posts include drive cap.

### 3/8" SunGuard™ Posts, FOB

4 ft . . . . .	F38-4SG. . . . .	<b>1.15</b>
5 ft . . . . .	F38-5SG. . . . .	<b>1.46</b>
6 ft . . . . .	F38-6SG. . . . .	<b>1.75</b>

### 1/2" SunGuard™ Posts, FOB

4 ft . . . . .	F12-4SG. . . . .	<b>1.79</b>
4 ft, drilled every 2" . . . . .	F12-4D . . . . .	<b>2.29</b>
5 ft . . . . .	F12-5SG. . . . .	<b>2.29</b>
6 ft . . . . .	F12-6SG. . . . .	<b>2.71</b>

### 2/3" SunGuard™ Posts, FOB

5 ft . . . . .	F23-5SG. . . . .	<b>4.19</b>
6 ft . . . . .	F23-6SG. . . . .	<b>5.05</b>
5 ft, drilled every 2" . . . . .	F23-5D . . . . .	<b>4.61</b>
6 ft, drilled every 2" . . . . .	F23-6D . . . . .	<b>5.45</b>
7 ft, drilled every 2" . . . . .	F23-7D . . . . .	<b>6.30</b>

### 7/8" SunGuard™ Posts, FOB


5 ft, drilled every 2" . . . . .	F78-5D . . . . .	<b>6.67</b>
6 ft, drilled every 2" . . . . .	F78-6D . . . . .	<b>7.92</b>

## Custom Cut Fiberglass Rod Posts

- Use for portable or permanent fencing
  - Perfect insulators
  - B-grade (uncoated)
- 5/8" B grade, FOB . . . . . F58-(ft) . . . . . **0.50/ft**

## Wire Twisting Tools

Wire Twist Tool, rod type . . . . .	TWT . . . . .	<b>3.00</b>
Kencove Flat Tool . . . . .	TWTL . . . . .	<b>1.25</b>

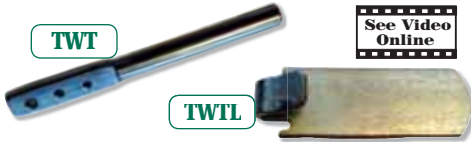

See Video Online

**Nylon Drive Caps** help prevent splintering the ends of the fiberglass rods when hammering into the ground. The cap is also useful when pushing rods into the ground with your hands.

For 3/8" rod . . . . .	F3N . . . . .	<b>4.85</b>
For 1/2" rod . . . . .	F2N . . . . .	<b>4.85</b>
For 5/8" & 2/3" rod . . . . .	F5N . . . . .	<b>5.55</b>
For 3/4" rod . . . . .	F34N . . . . .	<b>5.55</b>



## 3/8" Colored Fiberglass Rods

These high visibility rods can be used as line markers for parking lots, or use them for portable grazing in the winter. UV-stabilized.

4 ft, FOB . . . . .	F38-4Y . . . . .	<b>1.40</b>
5 ft, FOB . . . . .	F38-5Y . . . . .	<b>1.70</b>
6 ft, FOB . . . . .	F38-6Y . . . . .	<b>2.00</b>



## 48" Fiberglass Step-In Post

Four stationary clips designed to hold wire, rope or up to two-inch electric tape.

- 3/8" diameter
- SunGuard coating
- Will not rot, rust or cause shorts

4 ft SunGuard, FOB. . . . .	F38SSG . . . . .	<b>1.99</b>
-----------------------------	------------------	-------------

# Rotational Grazing



RPPL

RPPLS

RPPW

RRPW

RPT

## Heavy Duty Step-In Posts

- Solid "H" section for rigidity
- Eight spacing options
- Holds twine, ribbon or 4 lines of tape up to 1.6" wide

42" total length includes stake

White, FOB. . . . . RRPW . . . . . **2.25**

Blue, FOB . . . . . RRPBU . . . . . **2.25**

Yellow, FOB . . . . . RRPY . . . . . **2.25**

Save on box of 50 . . . . . **1.99**

## Double Pedal Step-In Post

8 clips to accommodate twine, ribbon or one strand of up to 1.5" tape. Long steel pin provides stability.

42" total length, FOB . . . RPPW . . . . **1.95**

## Heavy Duty Stirrup Post

gives great stability for easy installation.

64" total length, FOB . . . RPPLS . . . **4.25**

The **60" Plastic Step-In** works with all standard size tapes, twine, ropes and wires. Galvanized steel pin.

60" Step-in Post, FOB . . . RPPL . . . . **4.25**

## Pigtail Step-In Post

- Holds all sizes wire, twine or ribbon
- 30" height (from foot treadle)
- Heavy UV-stabilized plastic coating



Pigtail Step-In, FOB . . . RPT . . . . . **2.25**

Save on box of 60 . . . . . **1.99**

## Single Reel

- Carry handle
- Ratchet lock
- Twine/Tape guide
- Includes hook on frame to attach to fence
- Holds 1640 ft of twine or 656 ft ribbon

Single Reel . . . . . RRS . . . **32.95**

Geared Single Reel (3:1 ratio) . . . RRSR . . **45.95**



## Mini-Reel

- Compact size
- Holds up to 600 ft twine or 300 ft ribbon
- Lynch pin to replace spool quickly

Ideal for trail rides, gardens, pest control fence and short grazing fences.

Mini Reel . . . . . RMININ . . . . **14.95**

Replacement Spool . . . . . RMINIBN . . . **6.50**



**IMPROVED**

## Mega Reel

- Extra large reel
- Strong & durable
- Holds 1312 ft of ribbon or up to 2625 ft of polywire

Mega Reel . . . . . RRX . . . **42.75**

Geared Mega Reel (3:1 ratio) . . . RRXG . . **49.75**



## Replacement Bobbins

For Single O'Brien's Reel . . . RRSOB . . **13.75**

For Mega O'Brien's Reel . . . RRXOB . . **16.25**

Stafix Single Reel . . . . . RRSSB . . **14.40**

Stafix Large Reel . . . . . RRXSB . . **20.50**

# Rotational Grazing



**RH4**

**RW4G**

**RW4**

Electric twine and ribbon are ideal for portable or temporary fence. Stainless steel conductors and UV-stabilized polyethylene provide long life and durability. It is important to use a low-impedance fence charger with this type of fence material. (All chargers sold by Kencove are low-impedance)

## 1/2" Electric Ribbon

White, 1320 ft, 5 SS conductors . RW4G . . . **29.95**  
 White, 656 ft, 6 SS conductors . . RWRG . . . **16.50**

## 1/2" Stafix Electric Ribbon

- UV-stabilized
  - 6 Stainless Steel conductors
  - Ideal for strip grazing
- White, 656 ft. . . . . RWR . . . . . **23.65**  
 White, 1312 ft . . . . . RW4 . . . . . **44.55**  
 Orange, 656 ft . . . . . RHR . . . . . **23.65**  
 Orange, 1312 ft . . . . . RH4 . . . . . **44.55**



## Stainless Steel Splicer Buckle

Use with electric tape or ribbon up to 1" wide.

Splicer Buckle . . . . . RSB . . . . . **0.52**

## Neck Strap Reel

- Strap goes around your neck to hold the reel
- Holds up to 1600' twine or 656' ribbon
- Ideal for temporary pastures



Neck Strap Reel . . . . . RNR . . . . . **27.75**  
 Replacement Bobbin . . . . . RPRB . . . . . **17.50**

## Rod Post Reel

- Slides over rod posts up to 3/4" diameter
- Lock at any height
- Spring locking pin
- Holds up to 1600' twine or 656' ribbon



Rod Post Reel . . . . . RPR . . . . . **31.50**  
 Replacement Bobbin . . . . . RPRB . . . . . **17.50**



**R5D**

**R23**

**R49W**

*Enlarged to show detail. Not actual diameter.*



## Electric Twine - 3 SS Conductors

White, 656 ft. . . . . R23 . . . . . **5.95**

## Electric Twine - 6 SS Conductors

White, 656 ft. . . . . R2W . . . . . **14.20**  
 White, 820 ft . . . . . R2.5W . . . . . **8.75**  
 Orange, 656 ft . . . . . R2D . . . . . **5.95**  
 White, Stafix, 1640 ft . . . . . R5W . . . . . **36.90**  
 Orange, Stafix 1640 ft. . . . . R5D . . . . . **36.90**  
 White, 1640 ft . . . . . R5GW . . . . . **19.95**

## Electric Twine - 9 SS Conductors

White, Stafix, 1312 ft . . . . . R49W . . . . . **42.30**  
 White, 1312 ft . . . . . R49GW . . . . . **35.50**  
 Orange, 1320 ft . . . . . R49GO . . . . . **35.50**



## Stainless Steel Mini-Spring

to tension twine, ribbon, stainless steel or aluminum wire. Works like the larger springs for the high-tensile wire, but designed for low tension, light temporary or permanent fences. Total length 7.5".

Stainless Mini-Spring . . . . . HMSS . . . . . **2.95**

**Twist-Tight Tensioner** is excellent for taking up slack on light gauge wire, twine and ribbon fences without cutting the fence.



Twist-Tight Tensioner, 6/pk . . . . . RTT . . . . . **4.25**

# Rotational Grazing



## Plasson Quick-Coupler Valves

- Quick and easy to use
- One-handed operation
- Use for above ground or buried water systems

3/4" Female Coupler/Valve . . . . VC34 . . . . **9.95**  
 3/4" Riser, required male part . . VCR . . . . **3.99**



## RoJo Float Valve

- For low flow applications
- Fully adjustable float angle
- Versatile mounting options
- 3/4" pipe thread
- Pressure range 1-75 PSI

ROJO Float Valve. . . . . VJR . . . . . **29.95**



## TOPAZ Trough Valve

- Top mounting to prevent back siphoning
- Wing bolt for easy float adjustment
- Quick fill and high flow
- **Detach™** valve seal access

.78" - 2.3" water level differential  
 (increases as water inlet pressure increases)

Jobe Topaz Valve, 3/4" . . . . . VJT . . . . **62.95**  
 Jobe Topaz Valve, 1" . . . . . VJT1 . . . . **62.95**  
 Frost-Pro for VJT . . . . . VJTFP . . **13.50**  
 3/4" NPT to 3/4" hose adapter . . VCHA . . **2.95**  
 Topaz Service Kit. . . . . VJTM . . **15.95**



**easy to install**

## Megaflow Jobe Valves

- UV-Stabilized ABS Plastic
- One year warranty
- Bottom or side mount
- Non-corrosive Stainless Steel
- DETACH valve seal access system
- High flow valve for underwater installations

Pressure rating: VJV/VJT 5-150 PSI  
 (0.3-10 bar) VJV1 1" bottom mount only

Megaflow Valve, 3/4" . . . . VJV . . . . **46.95**  
 Megaflow Valve, 1" . . . . VJV1 . . . . **49.95**  
 Repair kit . . . . . VJVM . . . . **14.95**

Replacement parts available,  
 call or visit [www.kencove.com](http://www.kencove.com)



**See Video Online**

## Protect-A-Mount

- Installs easily - no tools needed
  - Use with Topaz or Rojo valves
  - UV-Stabilized ABS Plastic
- Mounts valves in accordance with USDA grade A regulations by providing an air gap from valve to water.

Protect-A-Mount . . . . . VJPM . . . . **57.75**



## Hudson Valves

- Top mount
- 1" thread
- 2-90 PSI
- Durable glass filled nylon
- Positive shut-off internal float
- Vented to eliminate siphoning

Hudson Valve. . . . . VHV . . . . **29.50**  
 Valve repair kit . . . . . VHV . . . . **11.95**



## Heavy Duty Mount Bracket

- Works with Hudson or Jobe Topaz valves
  - Attach to galvanized or Rubbermaid tanks
  - Valve connection guard prevents damage
- HD mount bracket . . . . . VBBHD . . . **19.95**





## Two-Bolt Rope Clamp

- Strong rope connections
- Can be used for easy tension adjustments
- Powder coated white

Two-Bolt Clamp, pack of 3 . . . CWBT . . . 2.55



## Kencove Splice Buckle

- For terminating or splicing
- Quick and easy to install

Splice Buckle. . . . . CRC . . . . . 0.85



Electrical Jumper . . . . . CRR . . . 4.75

Rope to Energizer Connector . . . CRE . . . 4.25

## EZ-Daisy Tightener

- High visibility
- Powder coated white
- Designed for rope and twine

EZ-Daisy Tightener . . . . . SSDR . . . . . 1.95

EZ-Daisy Handle . . . . . TFD . . . . . 9.95



## Electric Bungy Gate

- Safer and more visible than spring gates
- Elastic cord stretches up to 20 feet

GSR . . . . . 9.95



**Rope** makes an electric fence that is much more visible than wire or twine. It does not require braced end posts and it is easy to hand knot. Round rope doesn't wind-whip as much as electric ribbons, so post spacing can be wider and the higher breaking strength allows it to handle much more abuse. Rope works great for making electric gates as well.

## 1/4" Diameter Electric Rope

656 ft, .2mm conductors . . . . . RO2 . . . . . 29.75

656 ft, .4mm conductors . . . . . RO4 . . . . . 39.75

## 1/3" Diameter Electric Rope

At nearly 1/3" diameter, this rope has exceptional visibility and conductivity. 1598 lbs breaking strength.

**Largest diameter rope available!**

656 ft, white/green . . . . . RO8 . . . . . 59.75



## Keepsafe™ Horse Fence V-Mesh

- Ideal for horses, alpaca and other high value livestock
- Strong, flexible mesh construction
- Diamond mesh prevents injury
- Double-twisted 12.5 gauge horizontals
- 14 gauge diagonal wires
- Class 3 galvanized wire resists corrosion

50" height, 165 ft, FOB . . . . . WV50 . . . . . 452.40

58" height, 165 ft, FOB . . . . . WV58 . . . . . 533.60



# Horse Fence



**Kencote** is an attractive, affordable fence system requiring very little maintenance. It can handle animal impact and harsh weather conditions without permanent elongation. Our coated wire fence is manufactured with high-tensile wire molecularly bonded to UV-resistant polyethylene, creating a durable physical barrier with just enough give and more than enough strength to provide optimum safety for horses.

With 12.5 gauge, 200KSI wire as its core, Kencote is the strongest and most visible coated wire available! And with a thirty-year limited manufacturer's warranty, you will have security and peace of mind for decades to come.



**Safety-Loop** is the fastest, easiest way to terminate coated wire. Stripping coated wire is greatly reduced. Simply feed the wire through the Safety-Loop, wrap around post and insert into the spring-loaded end.

- Safe and highly visible
  - Powder coated white, brown or black
- Use to terminate Hotcote, Horsecote, Kencote or to build fast, safe brace units.

Safety-Loop, white . . . . . CWTW . . . . . 1.99  
 Safety-Loop, brown . . . . . CWTBR . . . . . 1.99  
 Safety-Loop, black . . . . . CWTBL . . . . . 1.99

- High visibility
- 200KSI 12½ gauge high-tensile wire core
- UV-resistant polyethylene coated wire
- Molecularly bonded

**Most visible coated wire on the market!**

**Thirty year limited factory warranty**

Kencote, 1320', FOB . . . . . WT\* . . . . . **164.75**

Save on 5 or more rolls . . . . . **161.75**

Shorts, FOB . . . . . WT\*FT. . . . . **0.08/ft**

\*= W (White), BL (Black), BR (Brown)

Because Kencote cannot be electrified, many use it with a few lines of Hotcote (page 35) to train horses.



**Kencote** is installed with the same principle as high tensile fence - same bracing requirements and 20 foot centers. Because the core of Kencote is high-tensile, it easily contours with natural dips and rises in the terrain. Install with 2" wide staples, leaving a slight gap between staple and post. Coated wire should be tensioned before stapling to the post.

## Coated Wire Tensioner



- Installed inline without cutting wire
- Specifically designed for coated wire
- Galvanized coating resists rust

Use to tension Hotcote, Horsecote or Kencote.  
 Coated Wire Tensioner . . . . . SCWT . . . . . **5.95**

Use **Hotcote Tubing** to cover splices and any possible retraction that may occur.



100' Hotcote Tube . . . . . 14H\* . . . . . **12.95**

\*= W (white), BL (black), BR (brown)



**Hotcote** is a coated fence wire similar in design to Kencote with addition to three black carbon strips extending to the surface to carry an electrical current. Although most animals will test any type of fence, this system has a combination of visibility and electric to ensure the safest containment possible.

Hotcote is available in three colors: white, black and brown. The diameter of the product is approximately 3/8" which is a visual aid to the horse.

- Conductive polyethylene core
- 12½ gauge, 200KSI wire
- Safe and highly visible

**Twenty year limited factory warranty**

Hotcote, 1320', White . . . . WSWH . . . **169.75**  
 Hotcote, 1320', Brown . . . . WSWBR . . **169.75**  
 Hotcote, 1320', Black . . . . WSWBL . . **169.75**  
 Save on 5 or more rolls . . . . . **165.75**  
 Hotcote, shorts, FOB . . . . . WSWHFT . **0.09/ft**  
*Hotcote does not qualify for free shipping.*



### Hotcote End Post Attachment

24" Wraparound Ins, 10/pk . . I40W-24 . 11.50  
 Lag Corner Insulator . . . . . ILCW . . . . **1.37**

**Insulated Underground Wire** can be installed to transfer electric under gates.

White, 100' . . . . . GU100W . . . **18.00**

### Kencove Corner Collar™

- Durable, UV-resistant
- High visibility
- Holds rope, Hotcote or smooth wire
- Easy-to-use pin-lock

**A must-have for corner wood posts.**

Corner Collar, black, 10/pk . . . ICPB . . . . **7.75**  
 Corner Collar, white, 10/pk . . . ICPW . . . . **7.75**



### Hotcote Accessories

4" Hotcote Insulator, 100/pk . . . I4H4\* . . **8.25**  
 100' Hotcote Tube . . . . . I4H\* . . . **12.95**  
 Pin-lock Insulator, white, 25/pk . . I8PW . . **6.50**  
 Pin-lock Insulator, black, 25/pk . . I8P . . . . **6.25**  
 Claw Insulator, white, 25/pk . . . ICCW . . **6.95**  
 \* = W (white), BL (black), BR (brown)



# Horse Fence



## Safe-Fence™

- High quality 1.5" wide polytape
  - 750 lb breaking strength
  - 15 Stainless steel conductors
  - Free shipping
- 20 year limited factory warranty\*




JR55W

Safe-Fence Electric Tape, 825 ft, white . . . . . JH3. . . . . **112.00**  
 Safe-Fence Electric Tape, 200 ft, white . . . . . JK3. . . . . **29.95**

## Safe-Fence™ Accessories

Splicer buckle, each . . . . . JR24. . . . . **1.65**  
 5 ft Vinyl T-post sleeve, white, FOB. . . . . JR1755. . . . . **5.65**  
 Vinyl 4x4 sleeve, each, FOB . . . . . JR4005. . . . . **19.95**  
 Wood Post Insulator, white, 25/pk . . . . . JR16W. . . . . **8.60**  
 End Buckle/Insulator, white, 2/pk . . . . . JR40W. . . . . **5.35**  
 Corner Buckle/Insulator, white, 2/pk . . . . . JR50W. . . . . **7.75**  
 T-style Buckles/Insulator, white, 2/pk . . . . . JR55W. . . . . **9.95**

*Safe-Fence polytape and accessories also available in black  
 \*Warranty valid if Safe-Fence products are used exclusively and  
 installed with maximum 16 ft post spacing.*

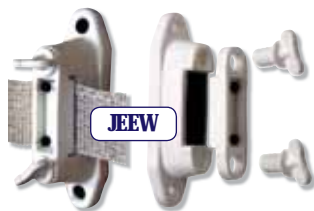

JEEW

## Kencove Electric Tape

- High visibility 1.57" wide
- Safe & effective
- 13 Stainless steel conductors
- UV-Stabilized Polyethylene

656 ft per roll, white. . . . . JGW. . . . . **39.95**  
 656 ft per roll, black. . . . . JGB. . . . . **39.95**

## Electric Tape Fence Accessories

Clamp Tightener, white . . . . . JEEW. . . . . **2.50**  
 Clamp Tightener, black. . . . . JEEB. . . . . **2.50**  
 Black Box Insulator . . . . . JBB. . . . . **1.40**  
 Connect Buckle, fits JBB . . . . . JBBC. . . . . **1.40**  
 T-Post Insulator, white, 25/pk . . . . . JTPW. . . . . **5.95**  
 T-Post Insulator, black, 25/pk. . . . . JTP. . . . . **4.95**  
 Wood Post Insulator, white, 25/pk . . . . . JWPW. . . . . **5.95**  
 Rod Post Insulator, white, 25/pk . . . . . JRPW. . . . . **8.10**  
 Insulator/Tightener, white. . . . . JEBW. . . . . **2.50**  
 Insulator/Tightener, black . . . . . JEB. . . . . **2.50**  
 Tape to Tape Jumper, SS, each . . . . . CTT. . . . . **4.95**  
 Tape to Energizer Connector, SS, each . . . . . CTE. . . . . **2.95**



JWPW



JTPW



JRPW



JEB



### Splicer Buckles

- 4", FOB.... WSB4\*..... **6.95**
- 5", FOB.... WSB5\*..... **7.95**
- 6", FOB.... WSB6\*..... **8.95**

\*= Indicate color W, BL, BR



### Split Spoolers

- 4", FOB.... WSSS4\*... **12.50**
- 5", FOB.... WSSS5\*... **13.50**
- 6", FOB.... WSSS6\*... **14.50**

### Spooler Handle

2 required for proper tensioning  
1/2" ratchet... THS... **.26.50**



### Pre-Bent End Buckles

- 4", FOB.... WEB4\*..... **7.95**
- 5", FOB.... WEB5\*..... **9.95**
- 5", FOB.... WEB6\*..... **10.50**

### Flat End Buckles

- 4", FOB.... WEBF4\*... **7.95**
- 5", FOB.... WEBF5\*... **9.95**
- 6", FOB.... WEBF6\*... **10.50**



### T-Buckle

- 4", FOB.... WST4\*... **8.95**
- 5", FOB.... WST5\*... **10.75**

\*= Indicate color W, BL, BR

### Hardware

- 1/2" x 5" Galv. Lag Screw... WEBB5... **1.00**
- 3/8" x 4" Galv. Lag Screw... WEBBS... **0.65**
- 4 1/4" Staples, FOB... WSPSB... **0.24**
- 1 3/4" SS Screws, 50/pk... HSS175... **3.50**
- Bending Tool... WBT\*... **11.75**

\*Indicate size: 4", 5", 6"



**Flexible Horserail** The 4" has 12.5 gauge wire molded into the top and bottom. The 5" and 6" have 3 wires top, bottom and center, giving extra strength and visibility. Because this rail is made with UV-stabilized, premium grade polyethylene on pre-straightened, 200,000 minimum PSI high-tensile, galvanized wire it has a long life and requires little maintenance. Posts should be no more than 12 feet apart. The ends and corners must be braced well to handle the abuse this fence can take. Rail and accessories available in white, black and brown.

### Thirty year limited factory warranty

- 4" x 330 ft, White, FOB... WSR4W3... **169.75**
- 4" x 660 ft, FOB... WSR4\*... **299.75**
- Save on 12 rolls... **285.00**
- 5" x 660 ft, FOB... WSR5\*... **399.75**
- Save on 10 rolls... **379.75**
- 6" x 660 ft, FOB... WSR6\*... **475.00**
- Save on 10 rolls... **450.00**

\*= Indicate color W, BL, BR

### Flat Line Brackets

- 4", FOB.... WSBL4\*... **0.95**
- 5", FOB.... WSBL5\*... **1.09**
- 6", FOB.... WSBL6\*... **1.75**

### Inside Line Brackets

- 4", FOB.... WSBRL4\*... **1.15**
- 5", FOB.... WSBRL5\*... **1.45**

\*= Indicate color W, BL, BR



### Inside 90° Bracket

- 4", FOB.... WSB94\*... **3.75**
- 5", FOB.... WSB95\*... **4.50**
- 6", FOB.... WSB96\*... **5.25**

\*= Indicate color W, BL, BR

## Shipping Policy

\*Free delivery on orders over \$75.00 with no FOB items. "FOB" means the product does not qualify for free shipping. These are usually large or heavy products. We pay for standard shipping on portion of order not marked FOB. If a truck shipment is lower cost and you can unload a truck, we pay the portion of the truck shipment cost that is non-FOB. FOB items are subject to change, please call or visit [www.kencove.com](http://www.kencove.com) for current status. Free shipping applies to the Continental US only. Call for shipping quotes to AK, HI, and Canada. \$30.00 pallet fee may apply for oversize items such as deer net, woven wire and t-posts.

Shipping carrier and charges are based on order weight, size and destination. We work with dozens of shipping carriers to find the best rates. For freight or flatbed shipments, customer is responsible for off-loading and signing for goods on arrival. Carefully inspect your order upon receipt and notify the carrier of damaged or missing packages. Shortages or error must be reported to Kencove within 48 hours. UPS/FedEx fees, such as address corrections and Saturday delivery, are charged as published by the shipping carrier.

## Returns

Returns must be pre-authorized within 90 days of receipt. 10% Restocking fee applied to all returned products.

## Payment Policy

Sales Tax is charged in PA, OH, IN, and KY. Signed forms are needed to show tax exempt status.

1. MasterCard/Visa/Discover Card
2. COD customers pay \$9.00 COD fee on orders under \$400.00
3. Pre-Payment (check/money order) received prior to shipping:
  - A) Call for quote, including applicable shipping charges.
  - B) Make check payable to:  
Kencove Farm Fence, Inc.
  - C) \$30.00 Returned Check Fee

## PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

Please call or visit [www.kencove.com](http://www.kencove.com) for current pricing.



## Easy ways to order

### Phone

800-536-2683 or 724-459-8991  
Monday - Thursday 7am - 6pm EST  
Friday 7am - 5pm EST  
Saturday 8am - noon EST (PA only)

### Fax

800-418-6631 (USA only) or 724-459-9148

### Online

[www.kencove.com](http://www.kencove.com) or [sales@kencove.com](mailto:sales@kencove.com)

### Mail or Stop In!

Pennsylvania warehouse:  
344 Kendall Rd  
Blairsville, PA 15717

Indiana warehouse:  
113 West 5th St  
PO Box 267  
Earl Park, IN 47942



## Deer Netting - Exclusion Fence

- 2" x 2.75" openings
- UV-resistant polypropylene
- Virtually invisible among vegetation

### Keep deer out of gardens and shrubs!

Due to size and weight restrictions, 8' x 330' netting (DN313D) must be shipped by truck; it cannot be delivered by UPS.

5'4" x 150', FOB. ....	DN313A ...	104.50
5'4" x 300', FOB. ....	DN313B ...	168.50
6'8" x 300', FOB. ....	DN313H ...	209.50
8' x 150', FOB. ....	DN313C ...	113.75
8' x 330', FOB. ....	DN313D ...	249.75
8' x 100', Extra Strength, FOB ....	DN313XS ...	153.95
6" Ground Staples, 250/pk . . . . .	DGS. . . . .	19.95
8" Nylon Cable Ties, 100/pk . . . . .	DN121G . . . . .	5.95
8 Gauge Nylon Wire . . . . .	DW152 . . . . .	0.16/ft
Hog Rings, 1000/pk. . . . .	CHR. . . . .	9.95
Automatic Hog Ring Gun . . . . .	THG. . . . .	99.95

# Order Form

Name \_\_\_\_\_

Shipping Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Phone \_\_\_\_\_

Email \_\_\_\_\_

Date \_\_\_\_\_ Customer No \_\_\_\_\_

**Mail to:**  
 Kencove Farm Fence  
 344 Kendall Rd  
 Blairsville, PA 15717  
**Fax to:**  
 800-418-6631  
**Email:**  
 sales@kencove.com

Quantity	Item Code	Description	Price Each	Price Total

Thank you for  
your order!

PA, OH, KY and IN residents add state sales tax. Free shipping on orders over \$75.00 with no FOB items- within continental US only. AK, HI and Canada residents call for shipping quotes. Orders under \$75.00 with no FOB items= \$9.00 shipping. Customer pays all shipping charges on FOB items. \$30.00 returned check fee. Prices subject to change without notice.	Sales Tax:	
	Shipping:	
	Order Total:	

Payment method (see payment terms, page 38):

Money order/cashiers check

Personal Check    Check No \_\_\_\_\_ Amt \_\_\_\_\_

Visa/Mastercard/Discover

Cardholder name: \_\_\_\_\_

Credit card #: \_\_\_\_\_ VIN # (last 3 digits on back of card): \_\_\_\_\_

Expiration date: \_\_\_\_\_ Signature: \_\_\_\_\_



**KENCOVE**  
FARM FENCE SUPPLIES

344 Kendall Road, Blairsville, PA 15717

PRSR STD  
US POSTAGE  
PAID  
RIPON, WI  
PERMIT NO 100



**High-Tensile**



**Woven Wire**



**Posts & Gates**



**Electric**



**Portable Supplies**



**Horse Fence**



**High-Tensile Fence**

Strong • Durable • Affordable  
Easy to build • Low maintenance

Phone: 800-536-2683 Fax: 724-459-9148

[www.kencove.com](http://www.kencove.com)